
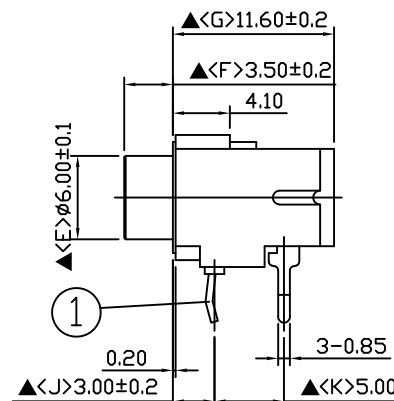
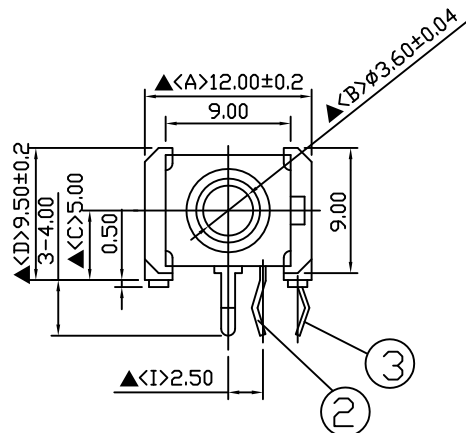



6.	Cover	PBT+15%	1	Black Color
5.	Housing	PBT+15%	1	Black Color
4.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Spring	0.3T YCuT	1	Silver Plated
2.	Break Terminal	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated
NO.	Description	Material	Q'TY	Finish

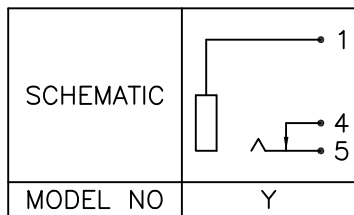

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.25.2021	王平華			


PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ356M0NYS0B00L

VERSION: 1.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant