


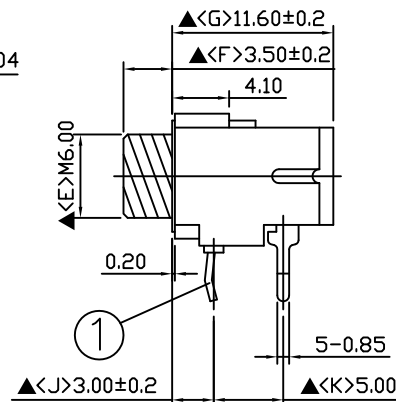
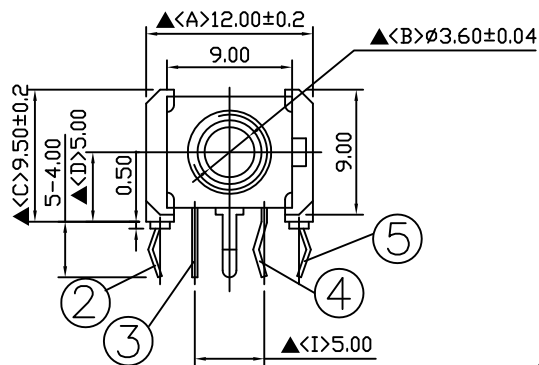


NUT



9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Cover	PBT+15%	1	Black Color
7.	Housing	PBT+15%	1	Black Color
6.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
5.	Tip Spring	0.3T YCuT	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated
NO.	Description	Material	Q'TY	Finish



Pin Hole Layout
(Jack Bottom View)



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.25.2021	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME :3.5∅ PHONE JACK

PART NUMBER: SCJ356M1NUS1B00L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension