


A


SCHEMATIC

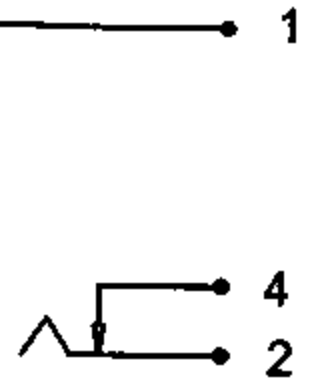


MODEL NO

Y


B

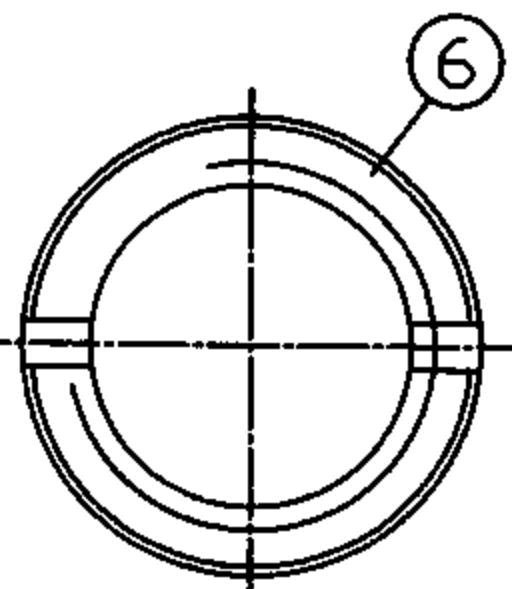




NUT

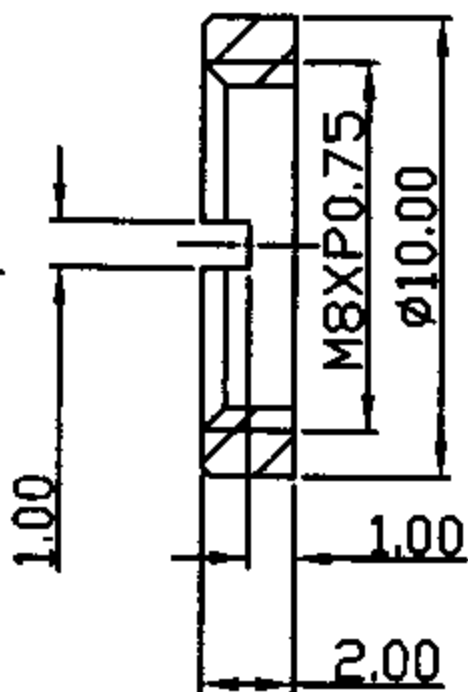

C

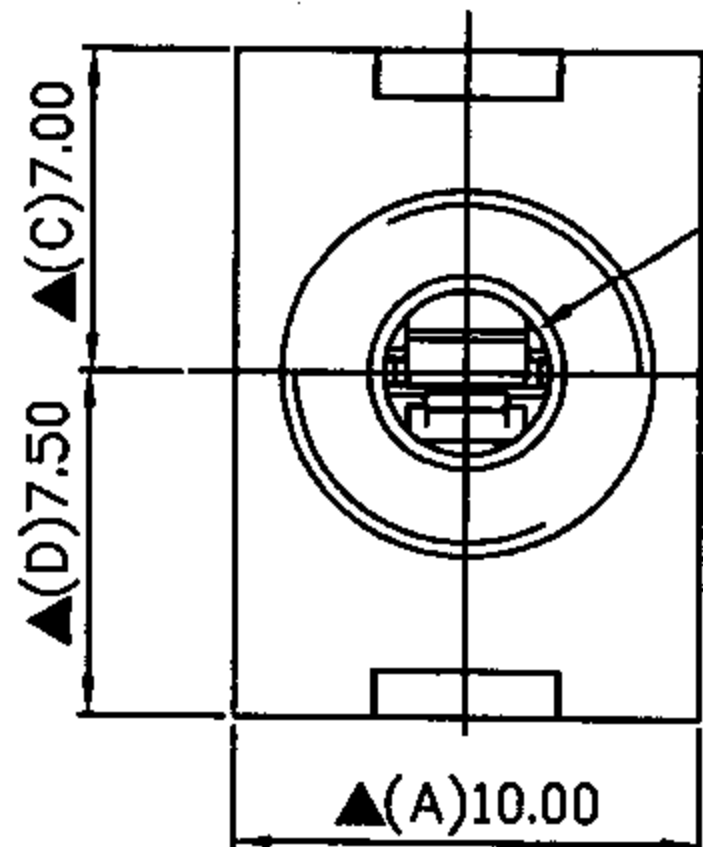

▲(E)3.50 ▲(F)12.50 ▲(G)3.50
▲(H)M8.0XP0.75

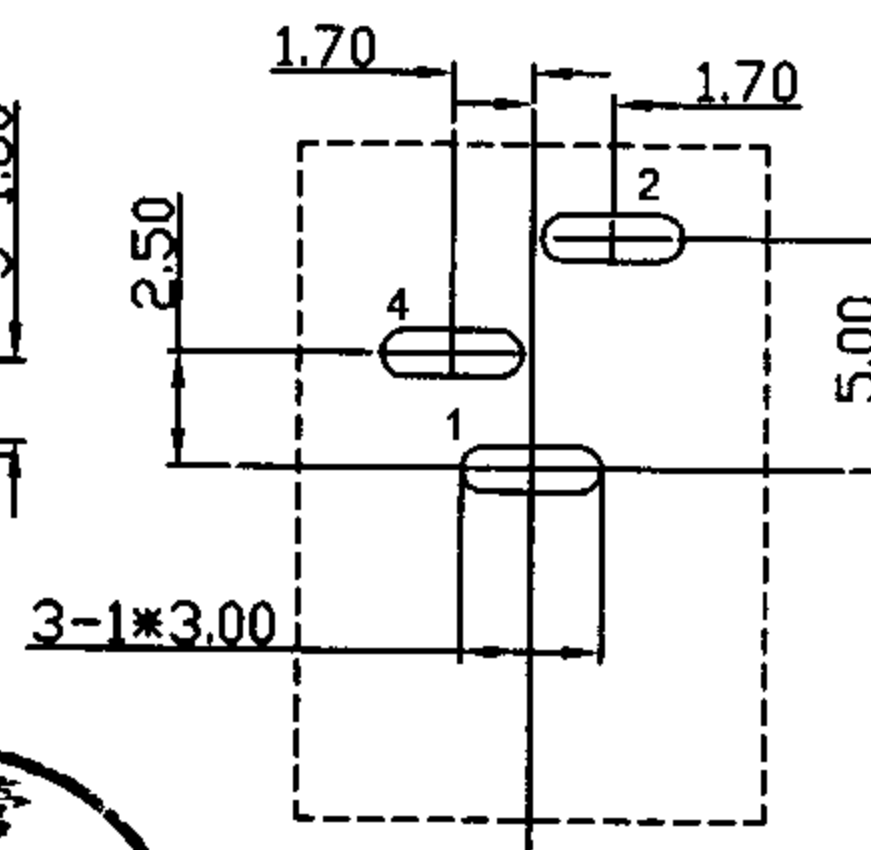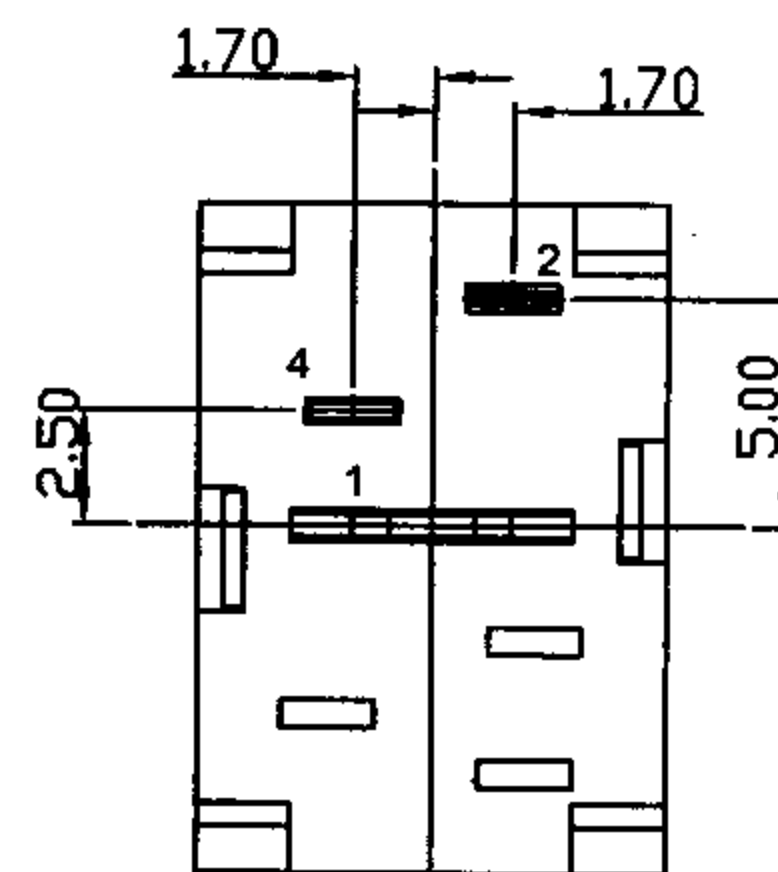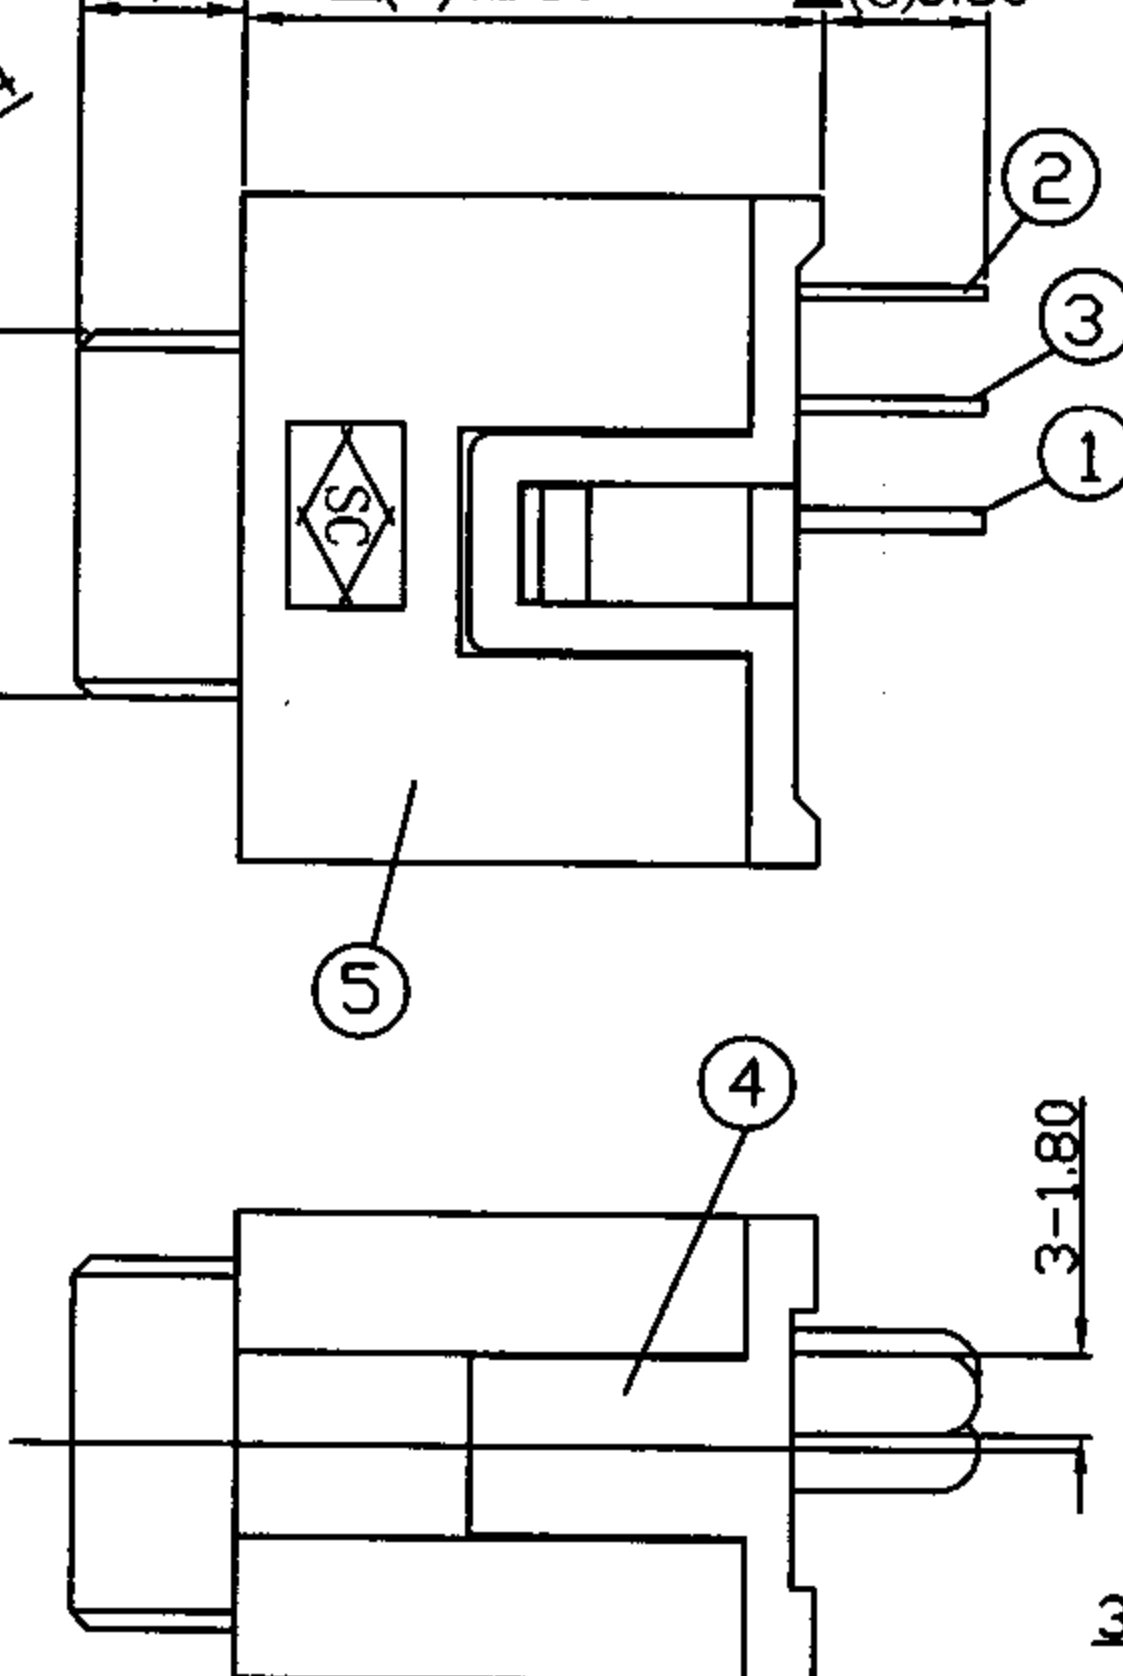HOLE LAYOUT
BOTTOM VIEW

D

6.	Nut	2.0T Brass	1	Nickel Plated
5.	Housing	PBT+15%	1	Black Color
4.	Cover	PA9T	1	Black Color
3.	Shunt Terminal A	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

E



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.09.2005	易愛娣	陳其明	王其明	總經理 陳其明 黃振文

PART NAME: 3.5Ø PHONE JACK

PART NUMBER: SCJ364P10YS3B00G

VERSION: 3.0

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC500V
 Dielectric Withstand Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

