


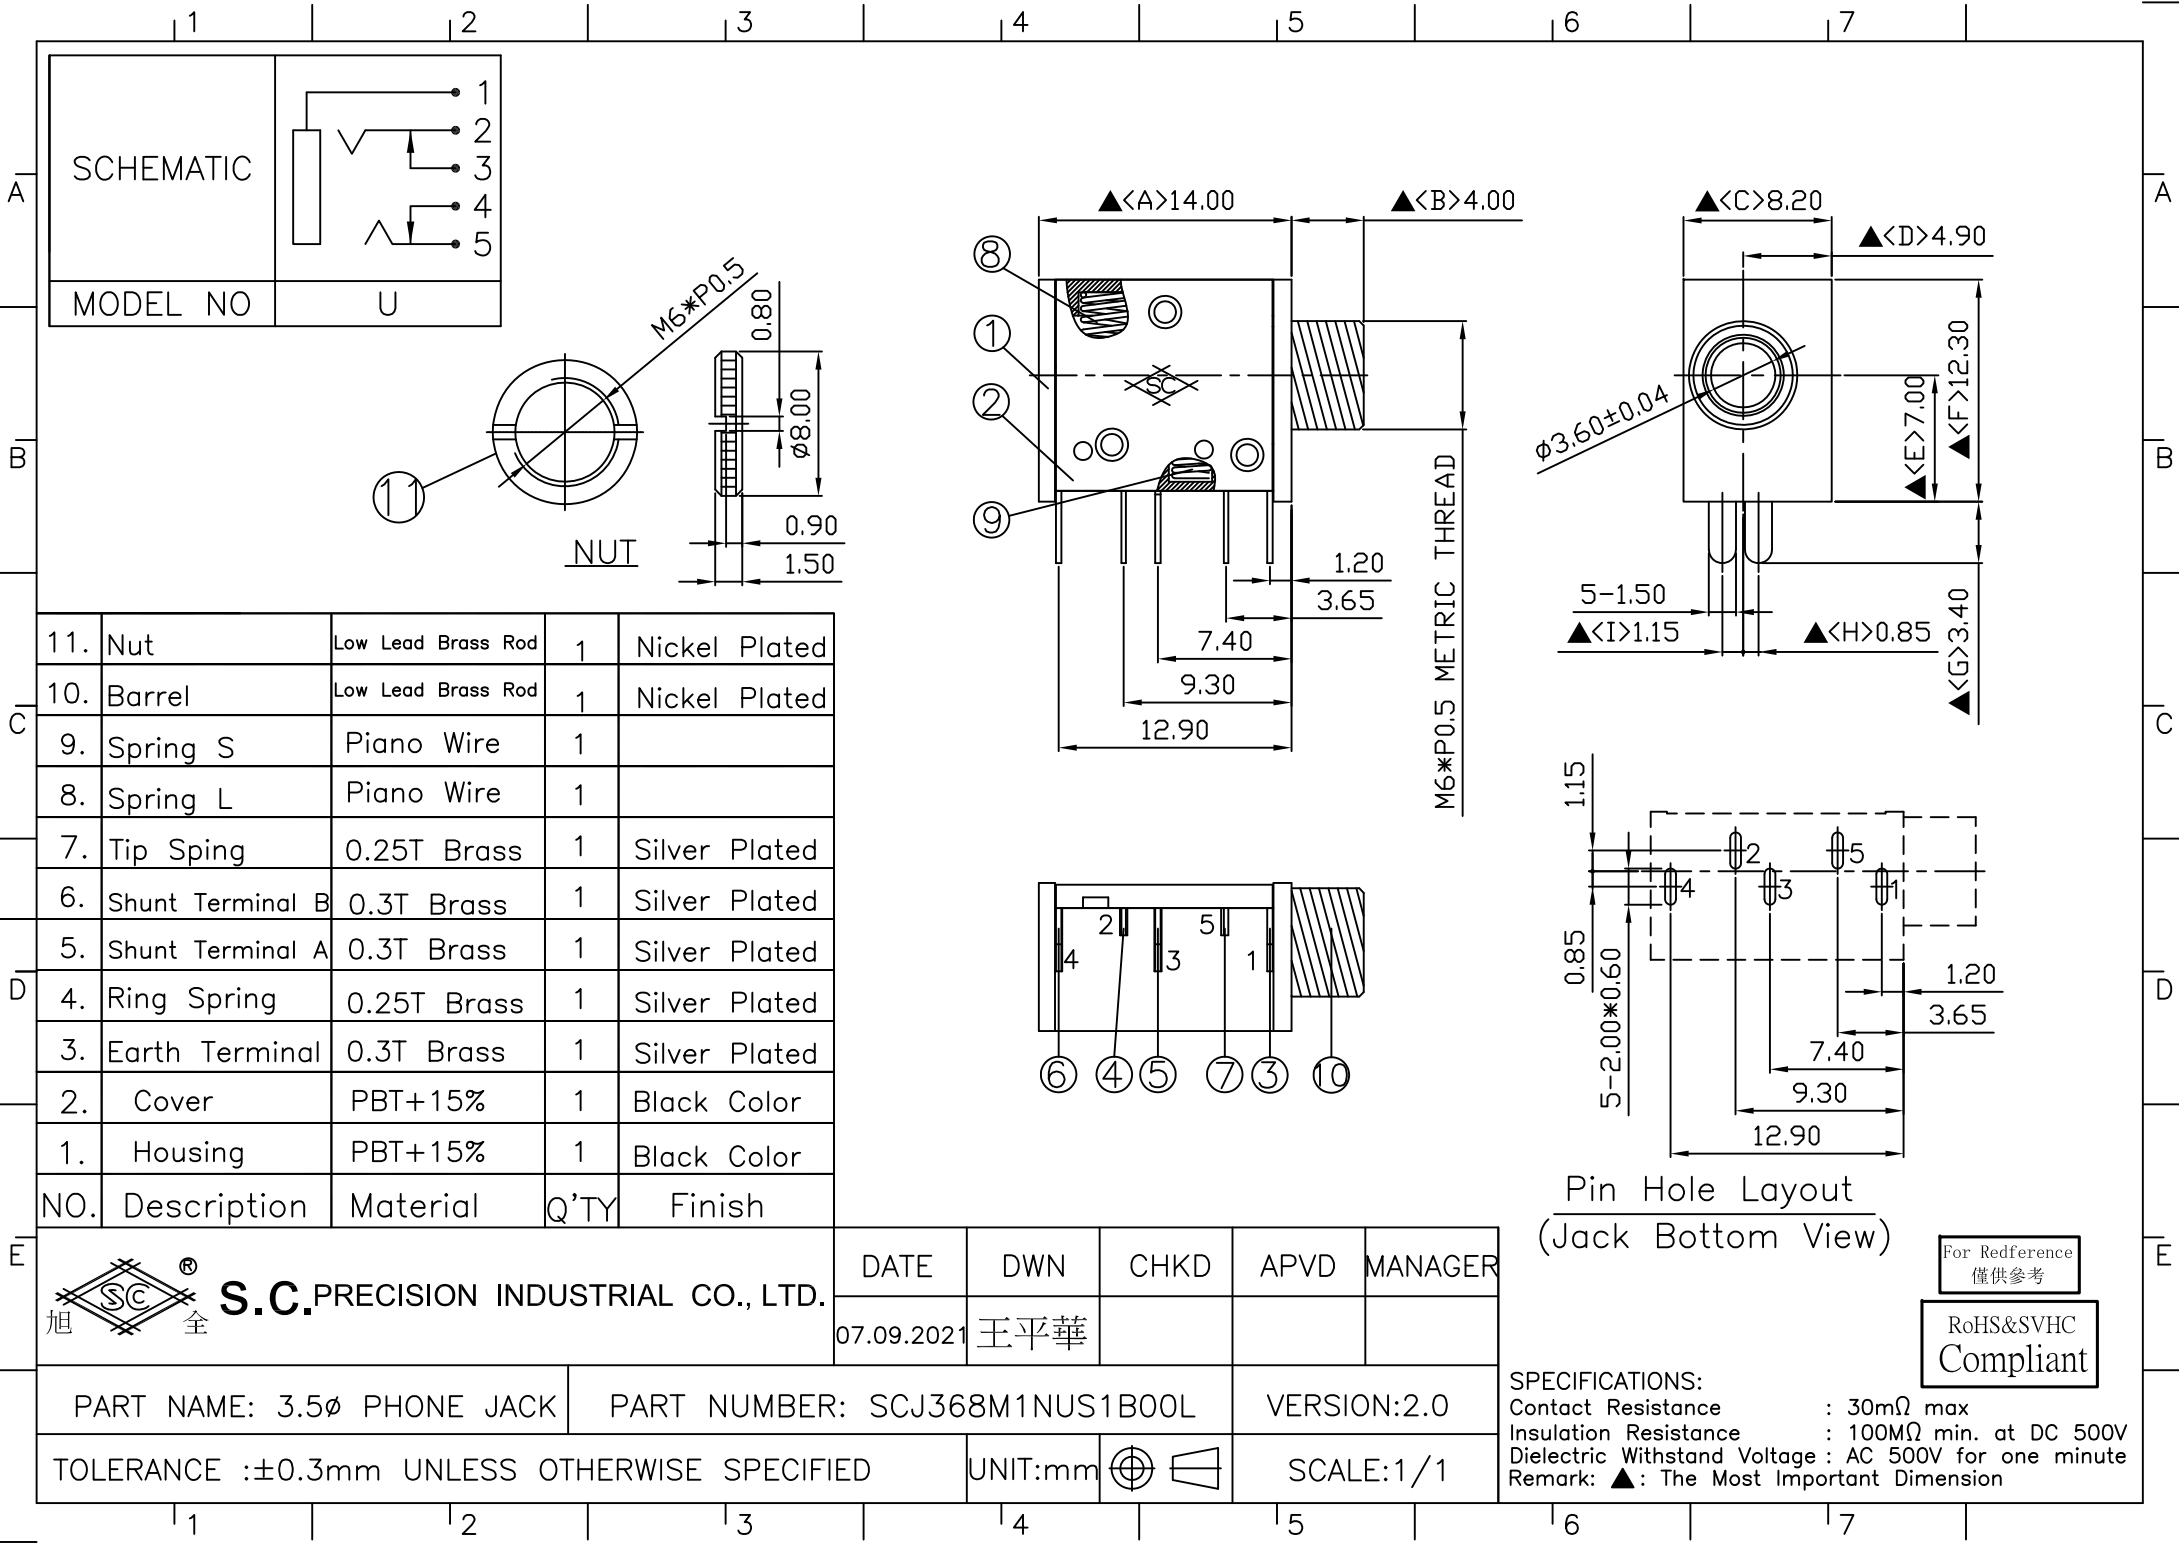

SCHEMATIC

MODEL NO

U

NUT

M6*P0.5 METRIC THREAD

Pin Hole Layout
(Jack Bottom View)

11.	Nut	Low Lead Brass Rod	1	Nickel Plated
10.	Barrel	Low Lead Brass Rod	1	Nickel Plated
9.	Spring S	Piano Wire	1	
8.	Spring L	Piano Wire	1	
7.	Tip Sping	0.25T Brass	1	Silver Plated
6.	Shunt Terminal B	0.3T Brass	1	Silver Plated
5.	Shunt Terminal A	0.3T Brass	1	Silver Plated
4.	Ring Spring	0.25T Brass	1	Silver Plated
3.	Earth Terminal	0.3T Brass	1	Silver Plated
2.	Cover	PBT+15%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE DWN CHKD APVD MANAGER

07.09.2021

王平華

PART NAME: 3.5ø PHONE JACK

PART NUMBER: SCJ368M1NUS1B00L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant