

A

B

C

D

E






A

B

C

D

E

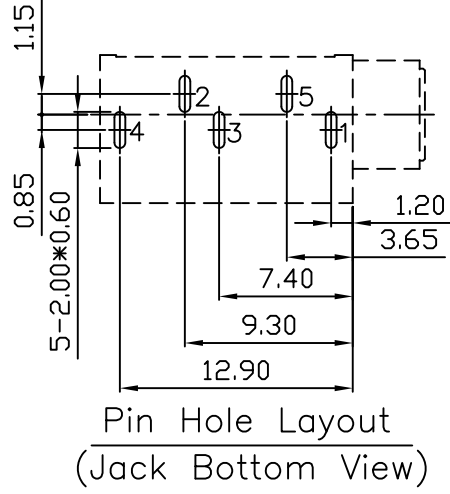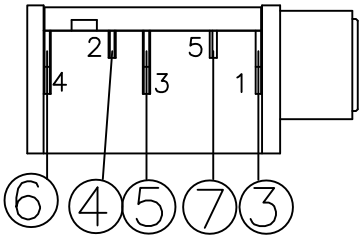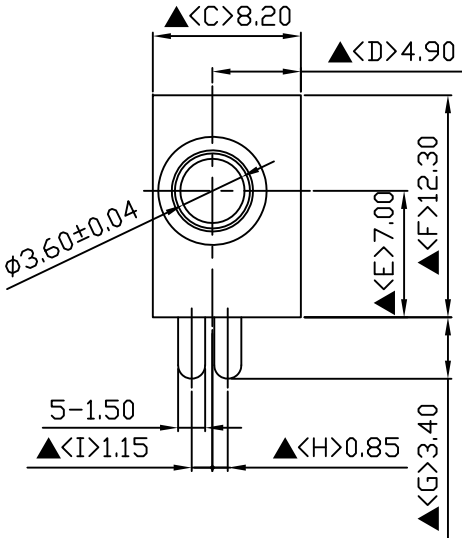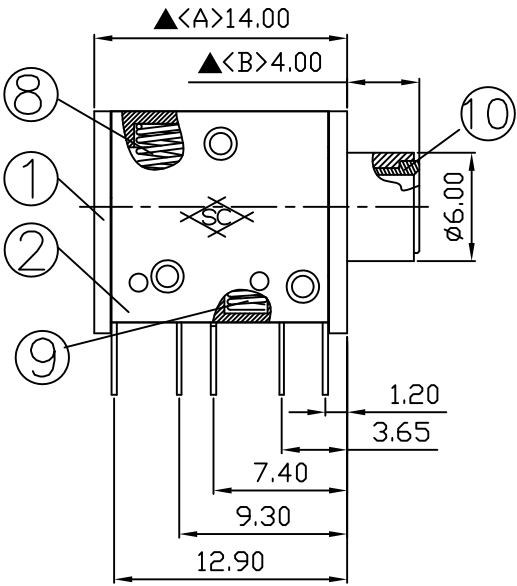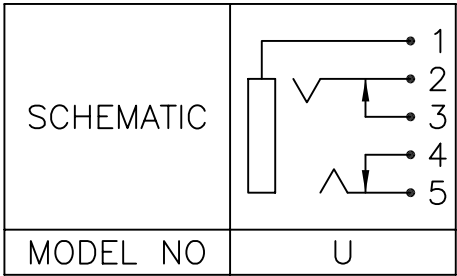

10.	Barrel	Low Lead Brass Rod	1	Nickel Plated
9.	Spring S	Piano Wire	1	
8.	Spring L	Piano Wire	1	
7.	Tip Sping	0.25T Brass	1	Silver Plated
6.	Shunt Terminal	0.3T Brass	1	Silver Plated
5.	Shunt Terminal	0.3T Brass	1	Silver Plated
4.	Ring Spring	0.25T Brass	1	Silver Plated
3.	Earth Terminal	0.3T Brass	1	Silver Plated
2.	Cover	PBT+15%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish

 旭全 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	07.09.2021	王平華			

PART NAME: 3.5ø PHONE JACK		PART NUMBER: SCJ368RONUS0B00L			VERSION:2.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant