

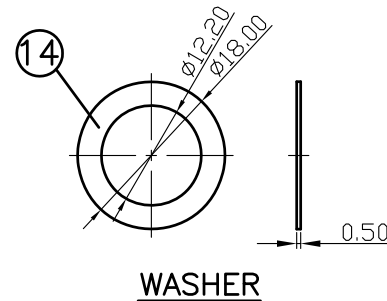
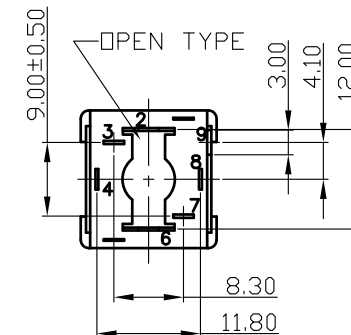
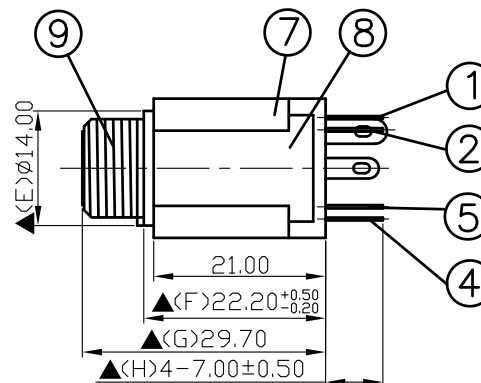

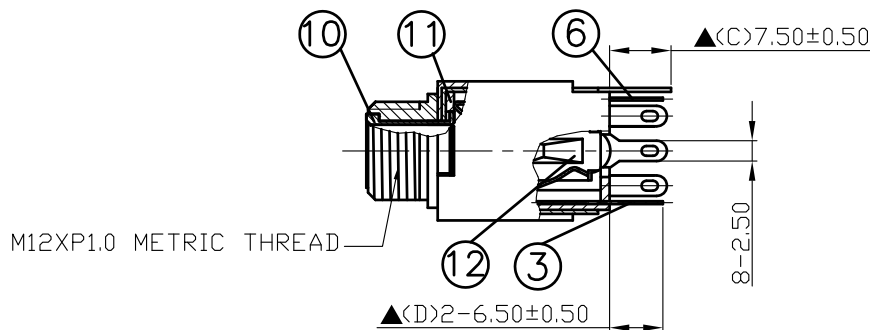


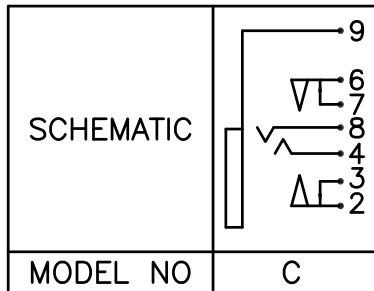

14.	Washer	0.5T Steel	1	Nickel Plated
13.	Nut	2.0T Steel	1	Nickel Plated
12.	Insulator	POM	2	Ivory Color
11.	Insulator	Red Vulcanited Fibre	1	Red Color
10.	Bushing	Low Lead Brass Rod	1	Nickel Plated
9.	Barrel(W/Thread)	POM	1	Black Color
8.	Cover	0.5T Steel	1	Nickel Plated
7.	Housing	POM	1	Black Color
6.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.4T Brass	1	Silver Plated
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	08.19.2021	王平華			

PART NAME :6.3φ PHONE JACK	PART NUMBER: SCJ610R3NCS1B11L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant