

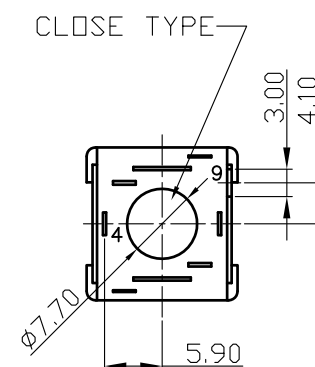
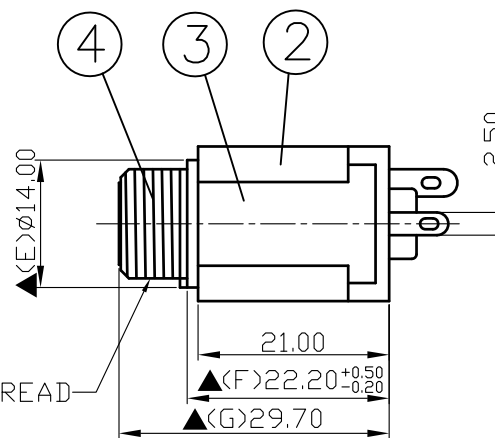
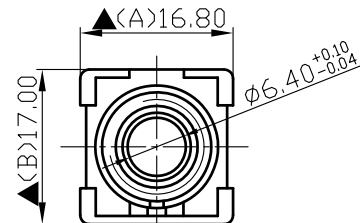
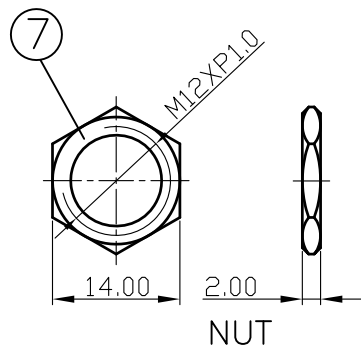
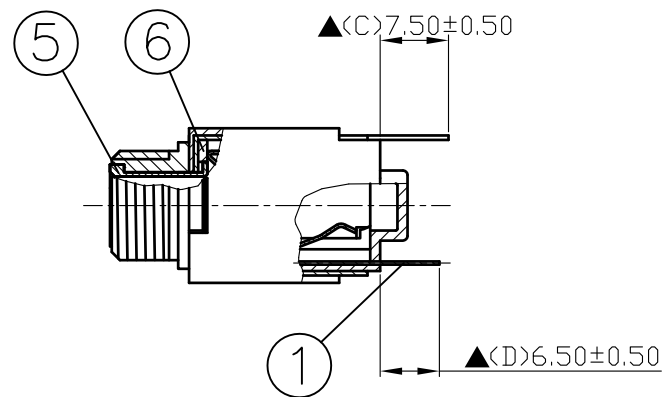


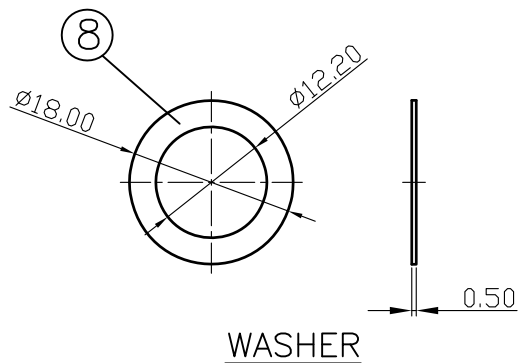

| 8.  | Washer           | 0.5T Steel            | 1    | Nickel Plated |
|-----|------------------|-----------------------|------|---------------|
| 7.  | Nut              | 2.0T Steel            | 1    | Nickel Plated |
| 6.  | Insulator        | Red Vulcanited Fibre  | 1    | Red Color     |
| 5.  | Bushing          | Low Lead Brass Rod    | 1    | Nickel Plated |
| 4.  | Barrel(W/Thread) | POM                   | 1    | Black Color   |
| 3.  | Cover            | 0.5T Steel            | 1    | Nickel Plated |
| 2.  | Housing          | POM                   | 1    | Black Color   |
| 1.  | Tip Spring       | 0.35T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description      | Material              | Q'TY | Finish        |

M12XP1.0 METRIC THREAD

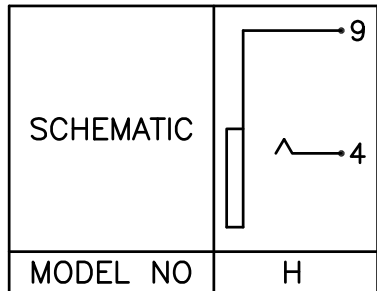

S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.20.2021 | 王平華 |      |      |         |

PART NAME :6.3 $\phi$  PHONE JACK

PART NUMBER: SCJ610R3NHS1B21L

VERSION:1.0

TOLERANCE : $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:  
 Contact Resistance : 30m $\Omega$  max  
 Insulation Resistance : 100M $\Omega$  min. at DC 500V  
 Remark:  $\blacktriangle$ : The Most Important Dimension

For Redderence  
 僅供參考

RoHS&SVHC  
 Compliant