







A

B

C

D

E

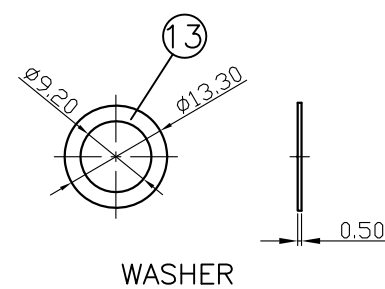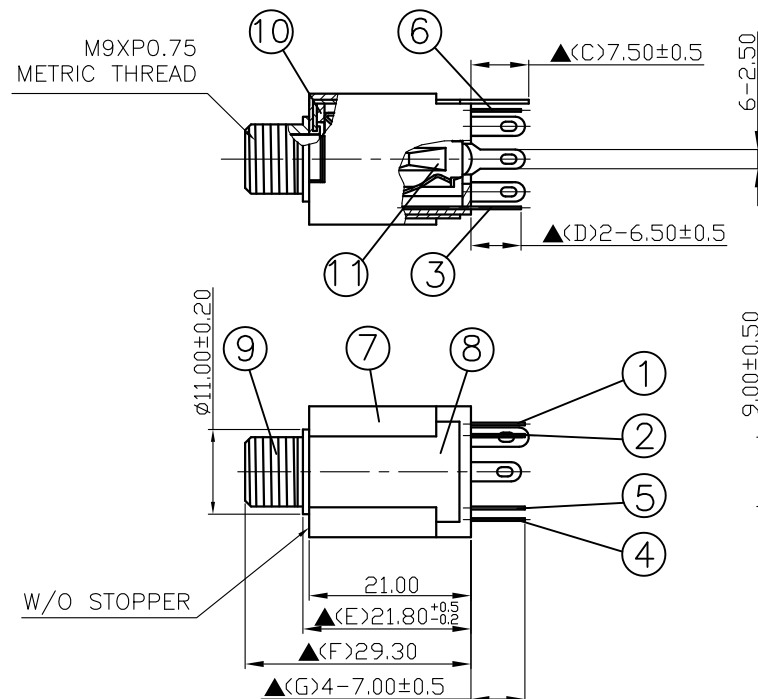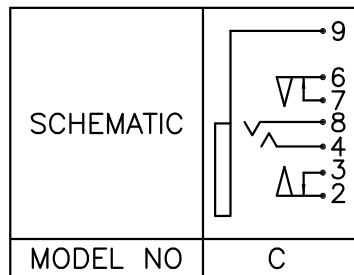

13.	Washer	0.5T Steel	1	Nickel Plated
12.	Nut	2.0T Steel	1	Nickel Plated
11.	Insulator	POM	2	Ivory Color
10.	Insulator	Red Vulcanited Fibre	1	Red Color
9.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
8.	Cover	0.5T Steel	1	Nickel Plated
7.	Housing	POM	1	Black Color
6.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.4T Brass	1	Silver Plated
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q' TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

08.11.2021

王平華

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ610M2NCS3B11L

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant