
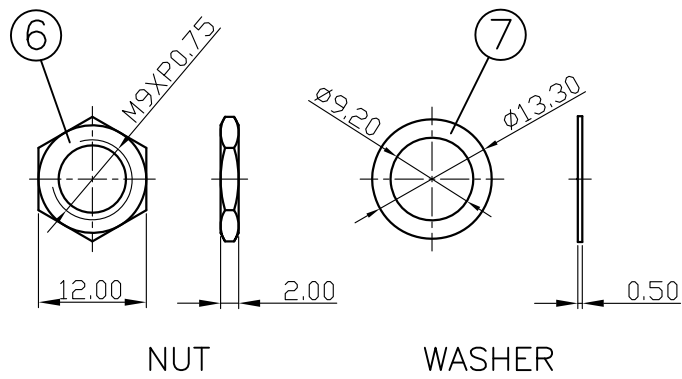
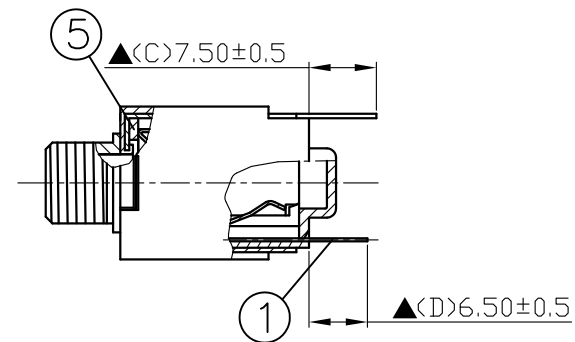
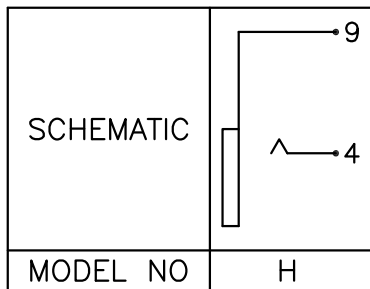



M9XP0.75 METRIC THREAD
W/O STOPPER

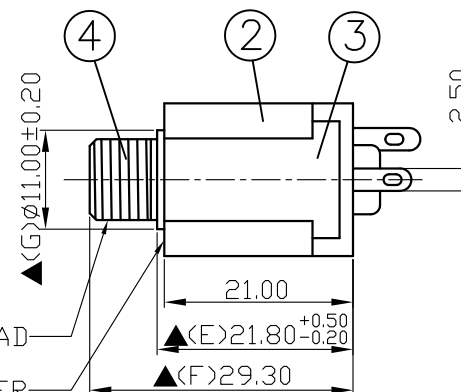

7.	Washer	0.5T Steel	1	Nickel Plated
6.	Nut	2.0T Steel	1	Nickel Plated
5.	Insulator	Red Vulcanited Fibre	1	Red Color
4.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
3.	Cover	0.5T Steel	1	Nickel Plated
2.	Housing	POM	1	Black Color
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	08.17.2021	王平華			

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ610M2NHS3B21L

VERSION: 1.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant