

A

B

C





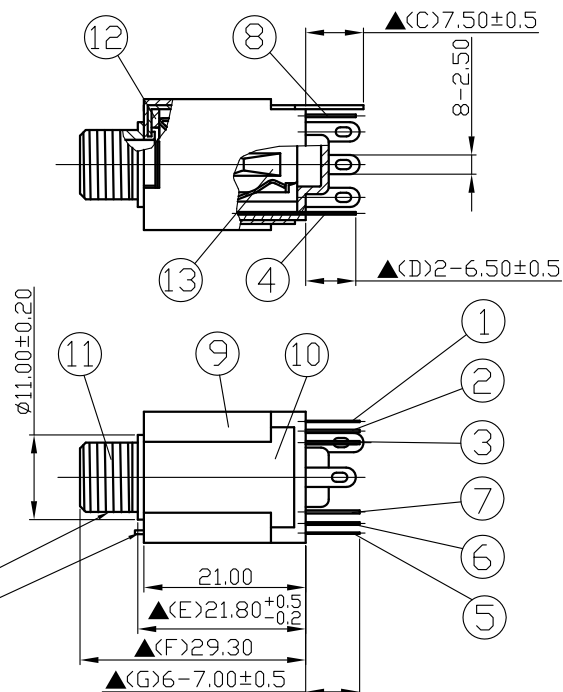
D

E


SCHEMATIC

MODEL NO

D

M9XP0.75 METRIC THREAD
WITH STOPPER

NUT



WASHER

15.	Washer	0.5T Steel	1	Nickel Plated
14.	Nut	2.0T Steel	1	Nickel Plated
13.	Insulator	POM	2	Ivory Color
12.	Insulator	Red Vulcanited Fibre	1	Red Color
11.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
10.	Cover	0.5T Steel	1	Nickel Plated
9.	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

DATE

DWN

CHKD

APVD

MANAGER

08.17.2021

王平華



S.C. PRECISION INDUSTRIAL CO., LTD.


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ610M2NDS3B22L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant