



A

B






C

D

E

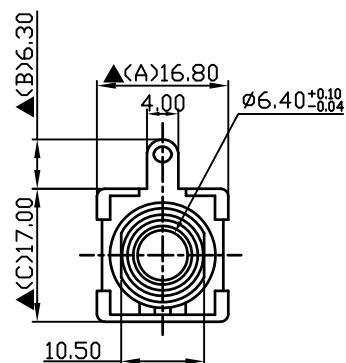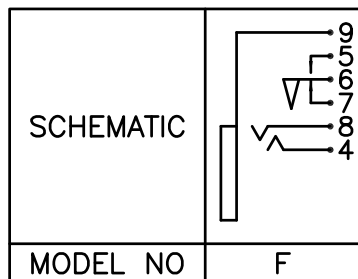

M12XP1.0
METRIC THREAD

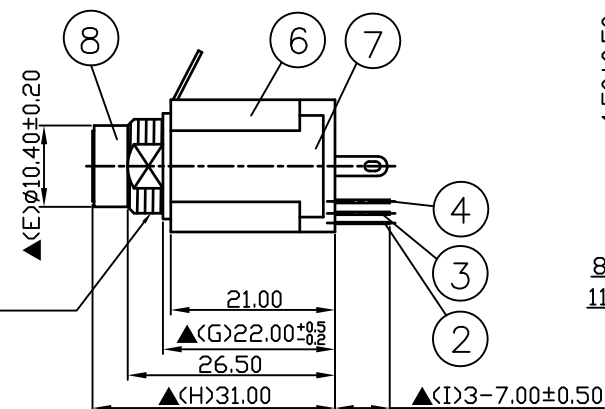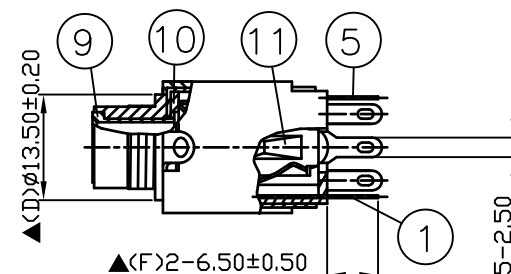

13	Washer	0.5T Steel	1	Nickel Plated
12	Nut	2.0T Steel	1	Nickel Plated
11	Insulator	POM	1	Ivory Color
10	Insulator	Red Vulcanited Fibre	1	Red Color
9	Bushing	Low Lead Brass Rod	1	Nickel Plated
8	Barre(W/Thread)	POM	1	Black Color
7.	Cover	0.5T Steel	1	Nickel Plated
6.	Housing	POM	1	Black Color
5.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
2.	Break Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.26.2021	王平華			

PART NAME : 6.3Ø PHONE JACK PART NUMBER: SCJ618RONFS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant