

A

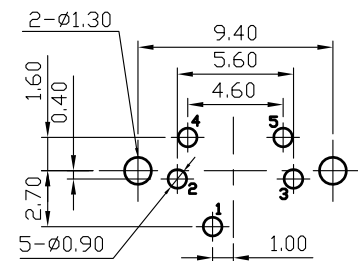
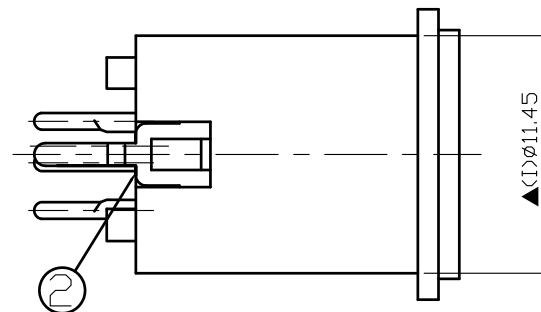
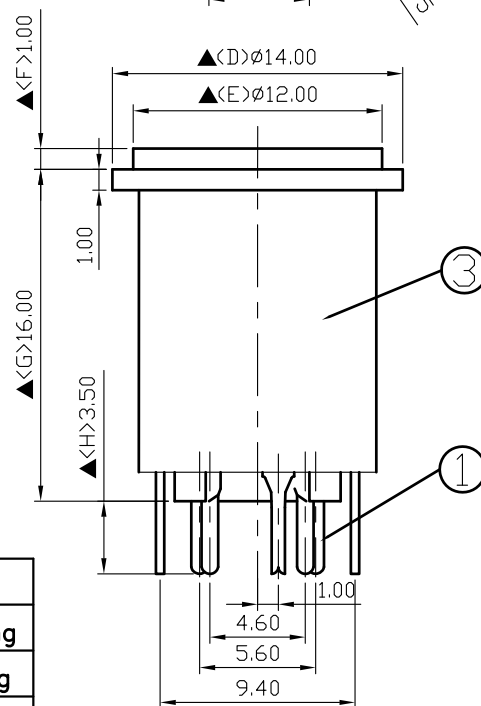
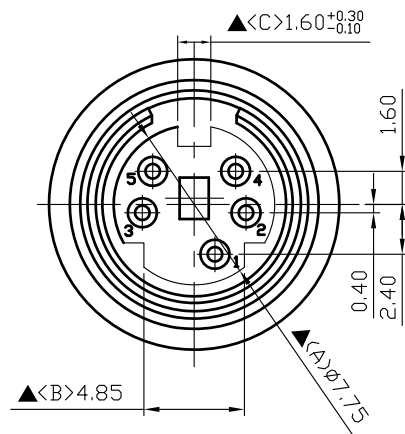

B

C

D

E

SCHEMATIC

Pin Hole Layout
(Jack Bottom View)

3.	Housing	PBT+30%	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	5	Silver Plating
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
02.21.2022	王平華			


PART NAME : DIN JACK

PART NUMBER: SCN573S5NS0B000G

VERSION:5.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension