

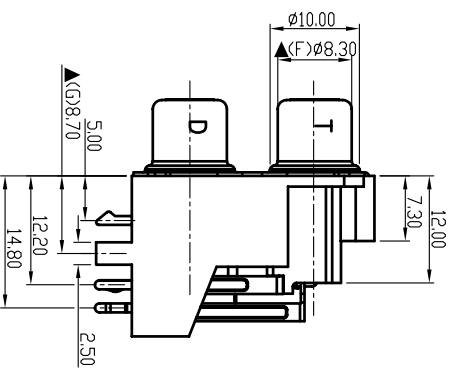
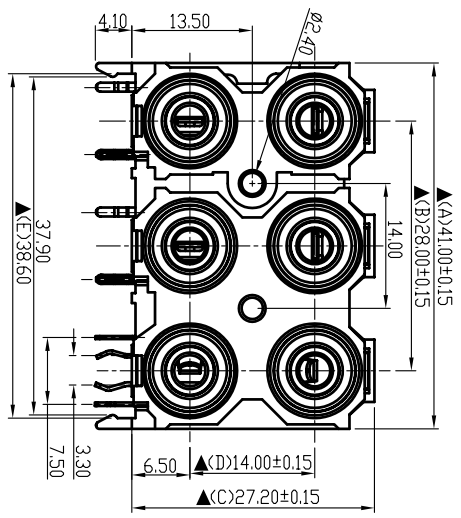
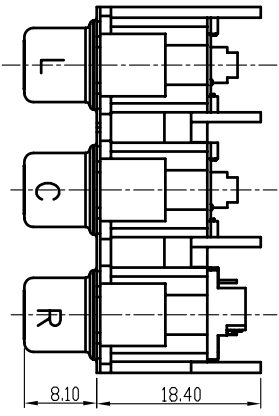
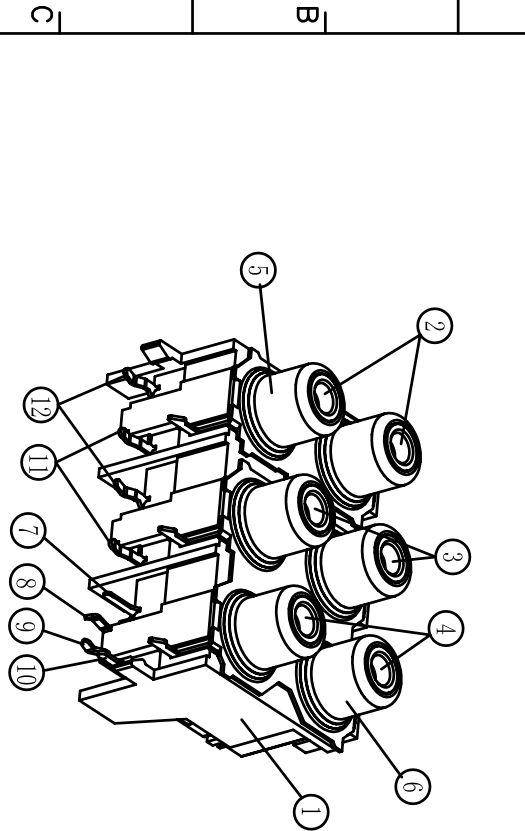


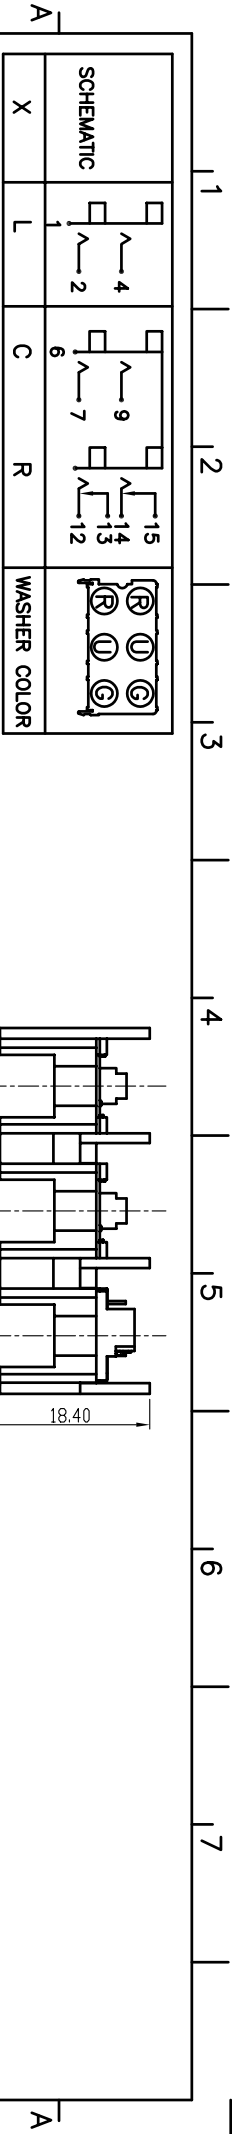

12.	Terminal 2	0.4T Brass	2	Silver Plated
11.	Terminal 1	0.4T Brass	2	Silver Plated
10.	Spring T	0.40T Phosphor Bronze	1	Silver Plated
9.	Terminal T	0.4T Brass	1	Silver Plated
8.	Terminal D	0.3T Brass	1	Silver Plated
7.	Spring D	0.35T Phosphor Bronze	1	Silver Plated
6.	Earth Terminal R	0.4T Brass	1	Nickel Plated
5.	Earth Terminal L	0.4T Brass	1	Nickel Plated
4.	Insulator R	PBT	2	Green Color
3.	Insulator C	PBT	2	Blue Color
2.	Insulator L	PBT	2	Red Color
1.	Housing	PA66+33%GF	1	Black Color
NO.	Description	Material	Q'TY	Finish

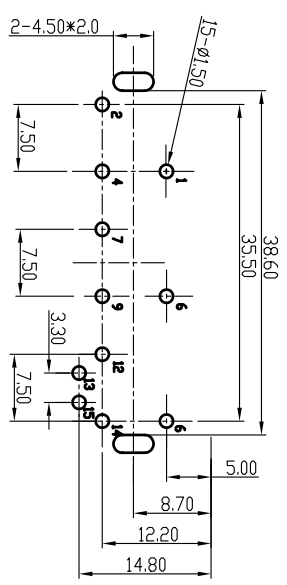

Pin Hole Layout
(Jack Bottom View)

E		S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
			09.21.2006				

PART NAME : PIN JACK	PART NUMBER:SCP672XNS225577G	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process
For Reference
僅供參考