
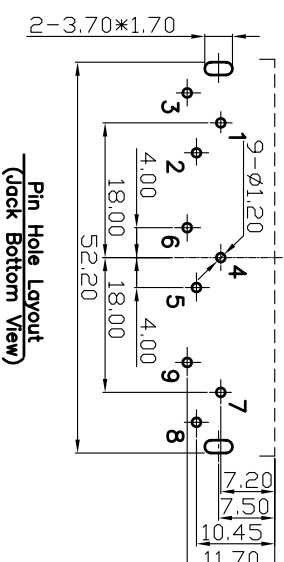
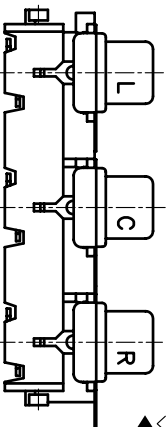
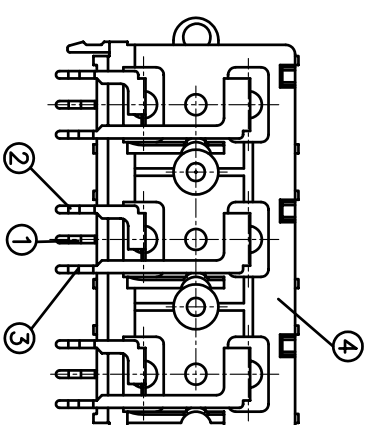



| SCHEMATIC |   |   | WASHER COLOR |     |     |
|-----------|---|---|--------------|-----|-----|
| 1         | 2 | 3 | 4            | 5   | 6   |
| L         | C | R | (M)          | (R) | (M) |

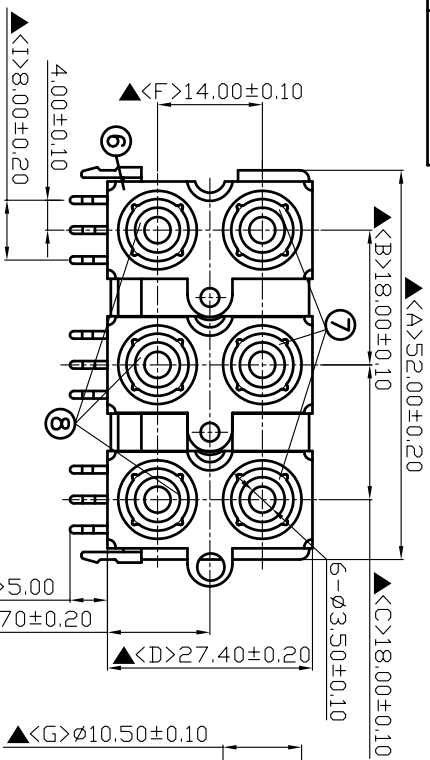

|     |                         |            |      |               |
|-----|-------------------------|------------|------|---------------|
| 8.  | Washer                  | PBT        | 3    | Red Color     |
| 7.  | Washer                  | PBT        | 3    | White Color   |
| 6.  | Metal Plate             | 0.2T Brass | 3    | Nickel Plated |
| 5.  | Cover                   | ABS        | 3    | Black Color   |
| 4.  | Base                    | ABS        | 1    | White Color   |
| 3.  | Terminal T              | 0.5T Brass | 3    | Silver Plated |
| 2.  | Terminal D              | 0.5T Brass | 3    | Silver Plated |
| 1.  | Earth Terminal (Barrel) | 0.5T Brass | 3    | Nickel Plated |
| NO. | Description             | Material   | Q'TY | Finish        |

**S.C.**PRECISION INDUSTRIAL CO., LTD.

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 09.06.2006 |     |      |      |         |

|                                              |                               |             |
|----------------------------------------------|-------------------------------|-------------|
| PART NAME : PIN JACK                         | PART NUMBER: SCP6923NS323232G | VERSION:2.0 |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm                       | SCALE:1/1   |

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲ : The Most Important Dimension

RoHS Compliant  
For Reference  
僅供參考