

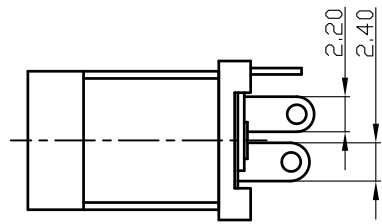
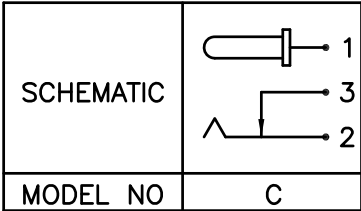
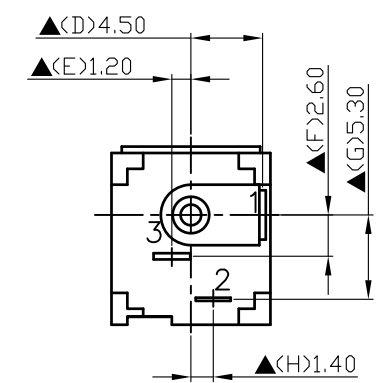


1 2 3 4 5 6 7

A


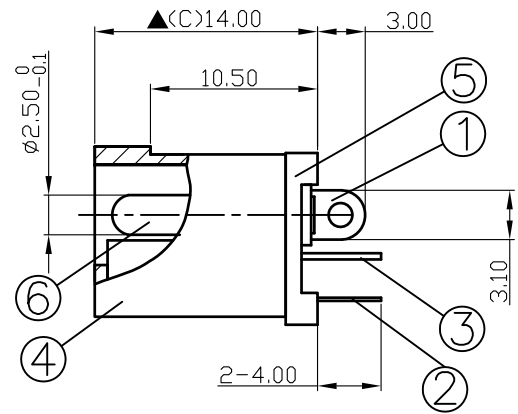


B

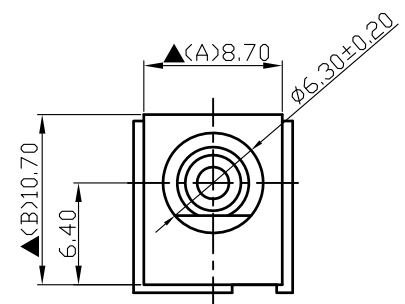

C

6.	Pin(2.5φ)	Brass	1	Nickel Plated
5.	Cover	PBT+30%	1	Black Color
4.	Housing	PBT+15%	1	Black Color
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.25 Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

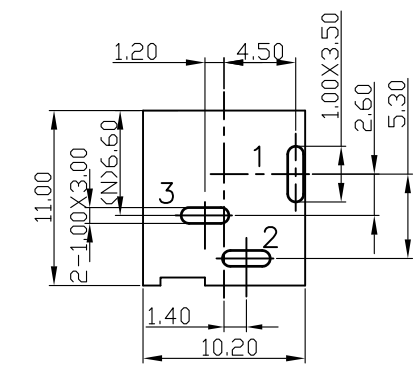

D

E



DATE	DWN	CHKD	APVD	MANAGER
09.24.2021	王平華			

PART NAME : DC POWER JACK	PART NUMBER: SCD437DCS000B00G	VERSION: 12.0
---------------------------	-------------------------------	---------------

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1
---	----------	------------

Pin Hole Layout
(Jack Bottom View)

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

1 2 3 4 5 6 7