
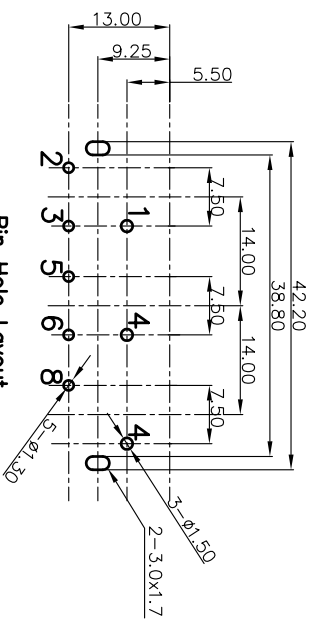
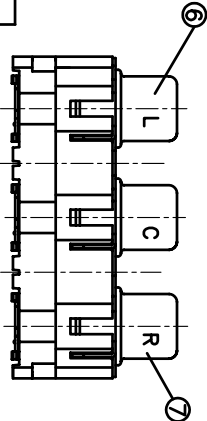
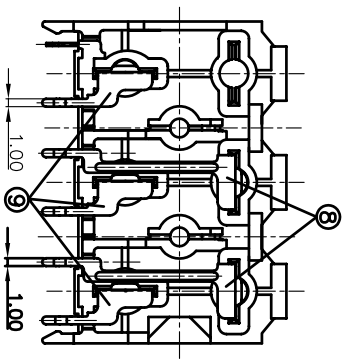
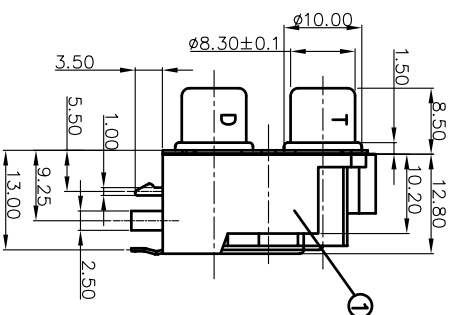
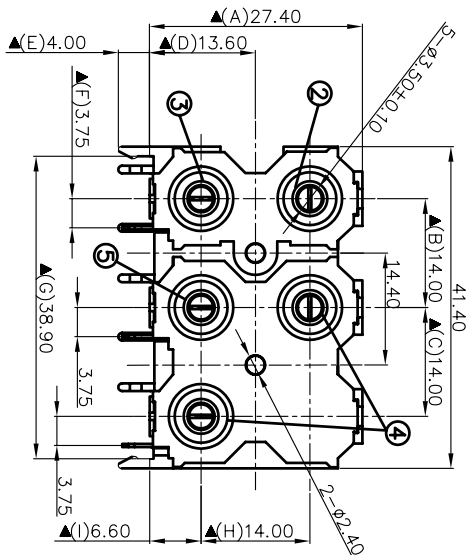


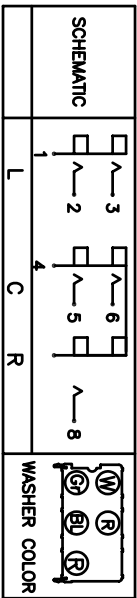

|     |                  |             |      |               |
|-----|------------------|-------------|------|---------------|
| 9.  | Terminal D       | 0.4T Bronze | 3    | Silver Plated |
| 8.  | Terminal T       | 0.4T Bronze | 2    | Silver Plated |
| 7.  | Earth Terminal R | 0.4T Bronze | 1    | Nickel Plated |
| 6.  | Earth Terminal L | 0.4T Bronze | 1    | Nickel Plated |
| 5.  | Washer C         | PBT         | 1    | Blue Color    |
| 4.  | Washer C&R       | PBT         | 2    | Red Color     |
| 3.  | Washer L         | PBT         | 1    | Green Color   |
| 2.  | Washer L         | PBT         | 1    | White Color   |
| 1.  | Housing          | PPO         | 1    | Black Color   |
| NO. | Description      | Material    | Q'TY | Finish        |

**S.C.** PRECISION INDUSTRIAL CO., LTD.

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 04.12.2007 |     |      |      |         |

PART NAME : PIN JACK

PART NUMBER:SCP6711NS372502G

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲ : The Most Important Dimension

RoHS Compliant

For Reference 僅供參考