

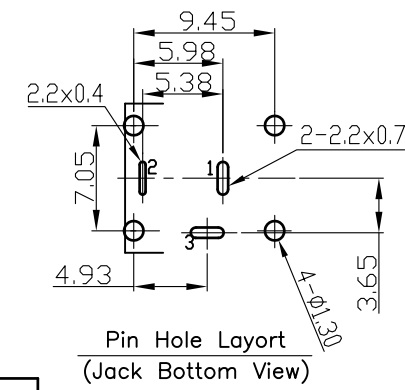
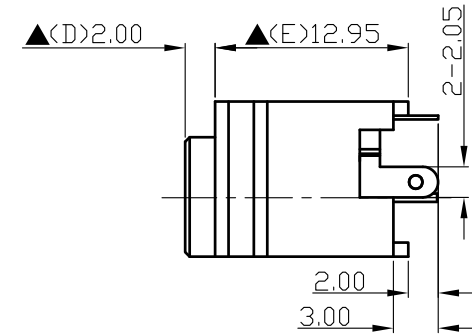
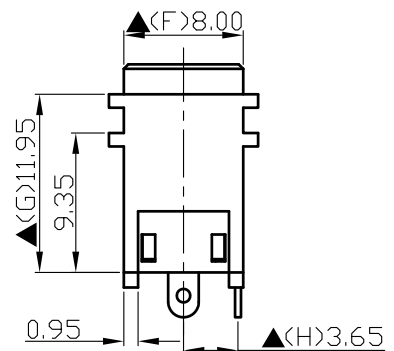
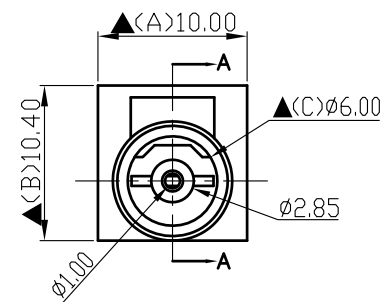



SCHEMATIC	
MODEL NO	C



4.	Housing	PBT+30%(UL94-V0)	1	Black Color
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ping Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
旭全	09.09.2021	王平華			

PART NAME : DC POWER JACK	PART NUMBER: SCD462ECS000B02G	VERSION:2.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 5.0A ,24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考
RoHS&SVHC
Compliant