

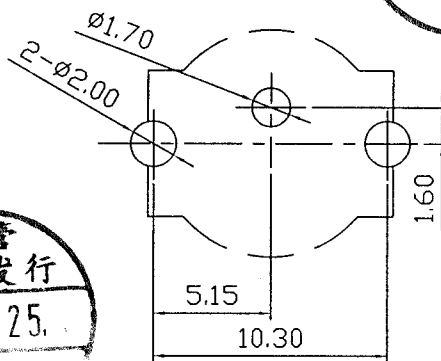
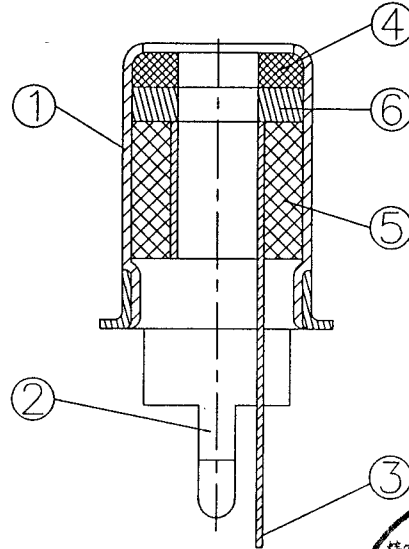
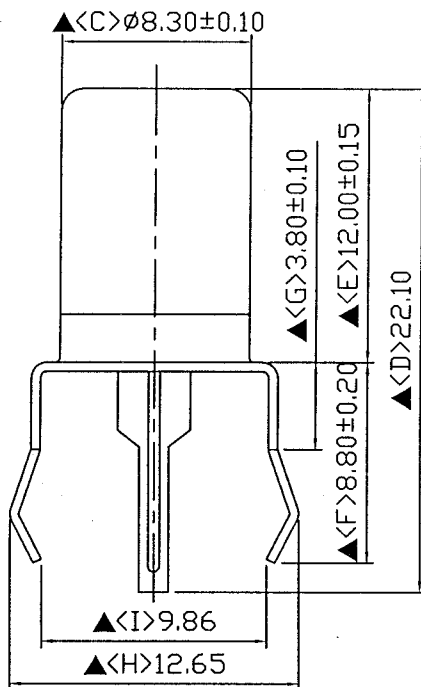


SCHEMATIC

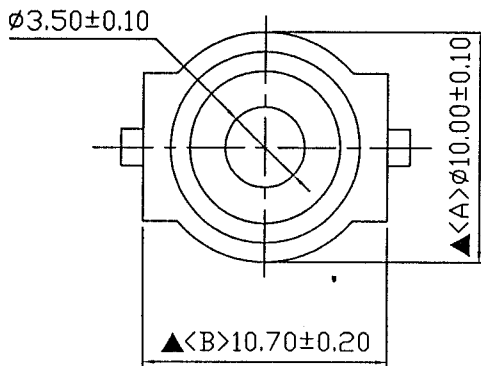

MODEL NO

U

Pin Hole Layout
(Jack Bottom View)

6.	Insulator	Bakelite	1	Black Color
5.	Insulator	PBT	1	Black Color
4.	Insulator	PBT	1	1795C Red Color
3.	Pin	0.25T Brass	1	Tin Plating
2.	Mounting Bracket	0.4T Iron	1	Tin Plating
1.	Phone Jack Shell	0.3T Brass	1	Nickel Plating
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

See "Details of Environment-Related Substance"
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

06.22.2005

黄志勇

黄志勇

黄志勇

黄志勇


PART NAME : PIN JACK

PART NUMBER: SCP606UNT2T0100

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /