

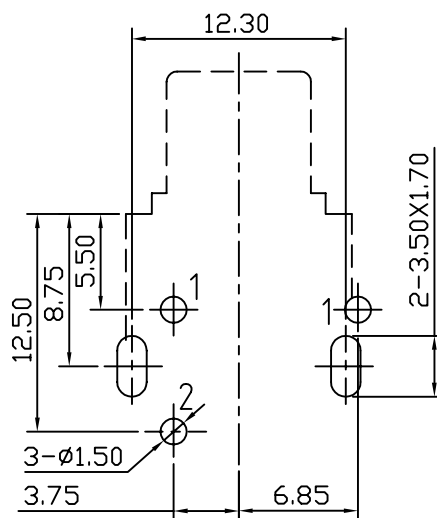
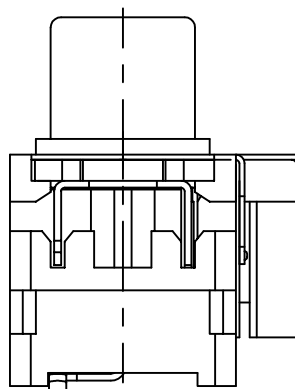
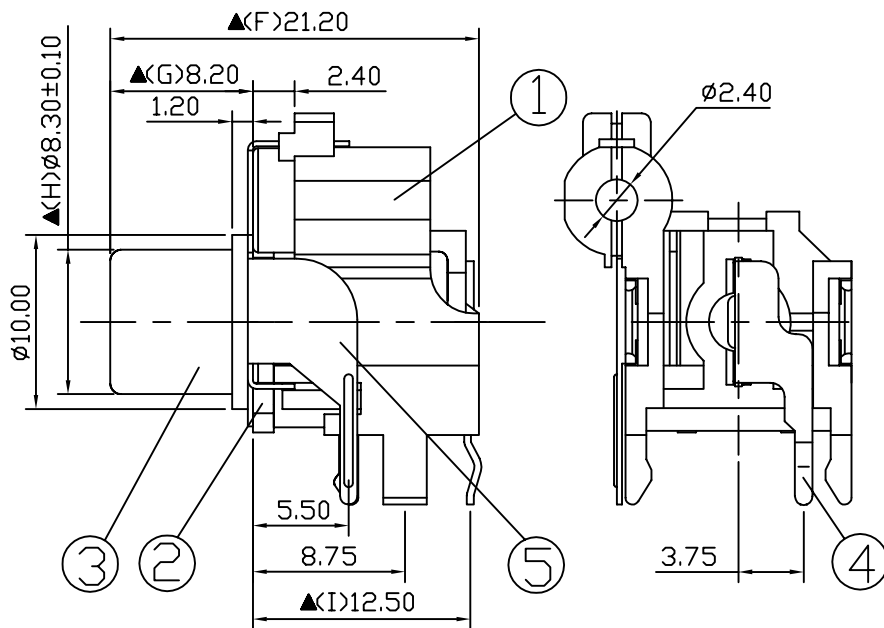


|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| MODEL NO  | U                                                                                 |

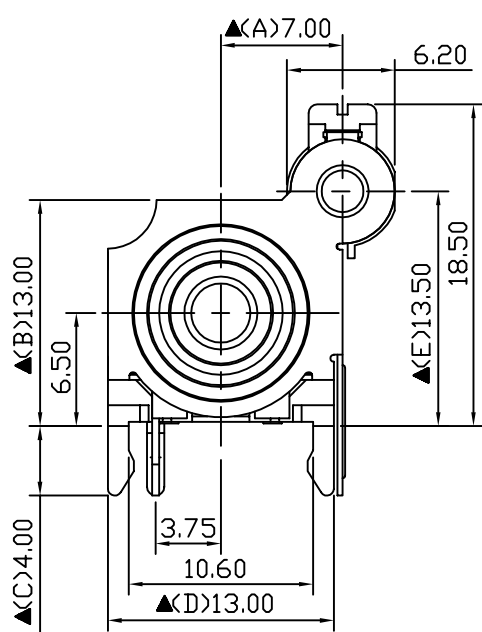

Pin Hole Layout  
(Jack Bottom View)

| 5.  | Earth1 Terminal | 0.3T Bronze | 1    | Nickel Plated |
|-----|-----------------|-------------|------|---------------|
| 4.  | Terminal        | 0.4T Bronze | 1    | Silver Plated |
| 3.  | Outer Contact   | 0.4T Bronze | 1    | Nickel Plated |
| 2.  | Cover           | ABS         | 1    | Black Color   |
| 1.  | Housing         | ABS         | 1    | Black Color   |
| NO. | Description     | Material    | Q'TY | Finish        |

RoHS  
Compliant

For Reference  
僅供參考

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲ : The Most Important Dimension



S.C. PRECISION INDUSTRIAL CO., LTD.


| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 12.09.2005 |     |      |      |         |

PART NAME : PIN JACK

PART NUMBER: SCP618UNS1NS000G

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm 

SCALE:1/1