


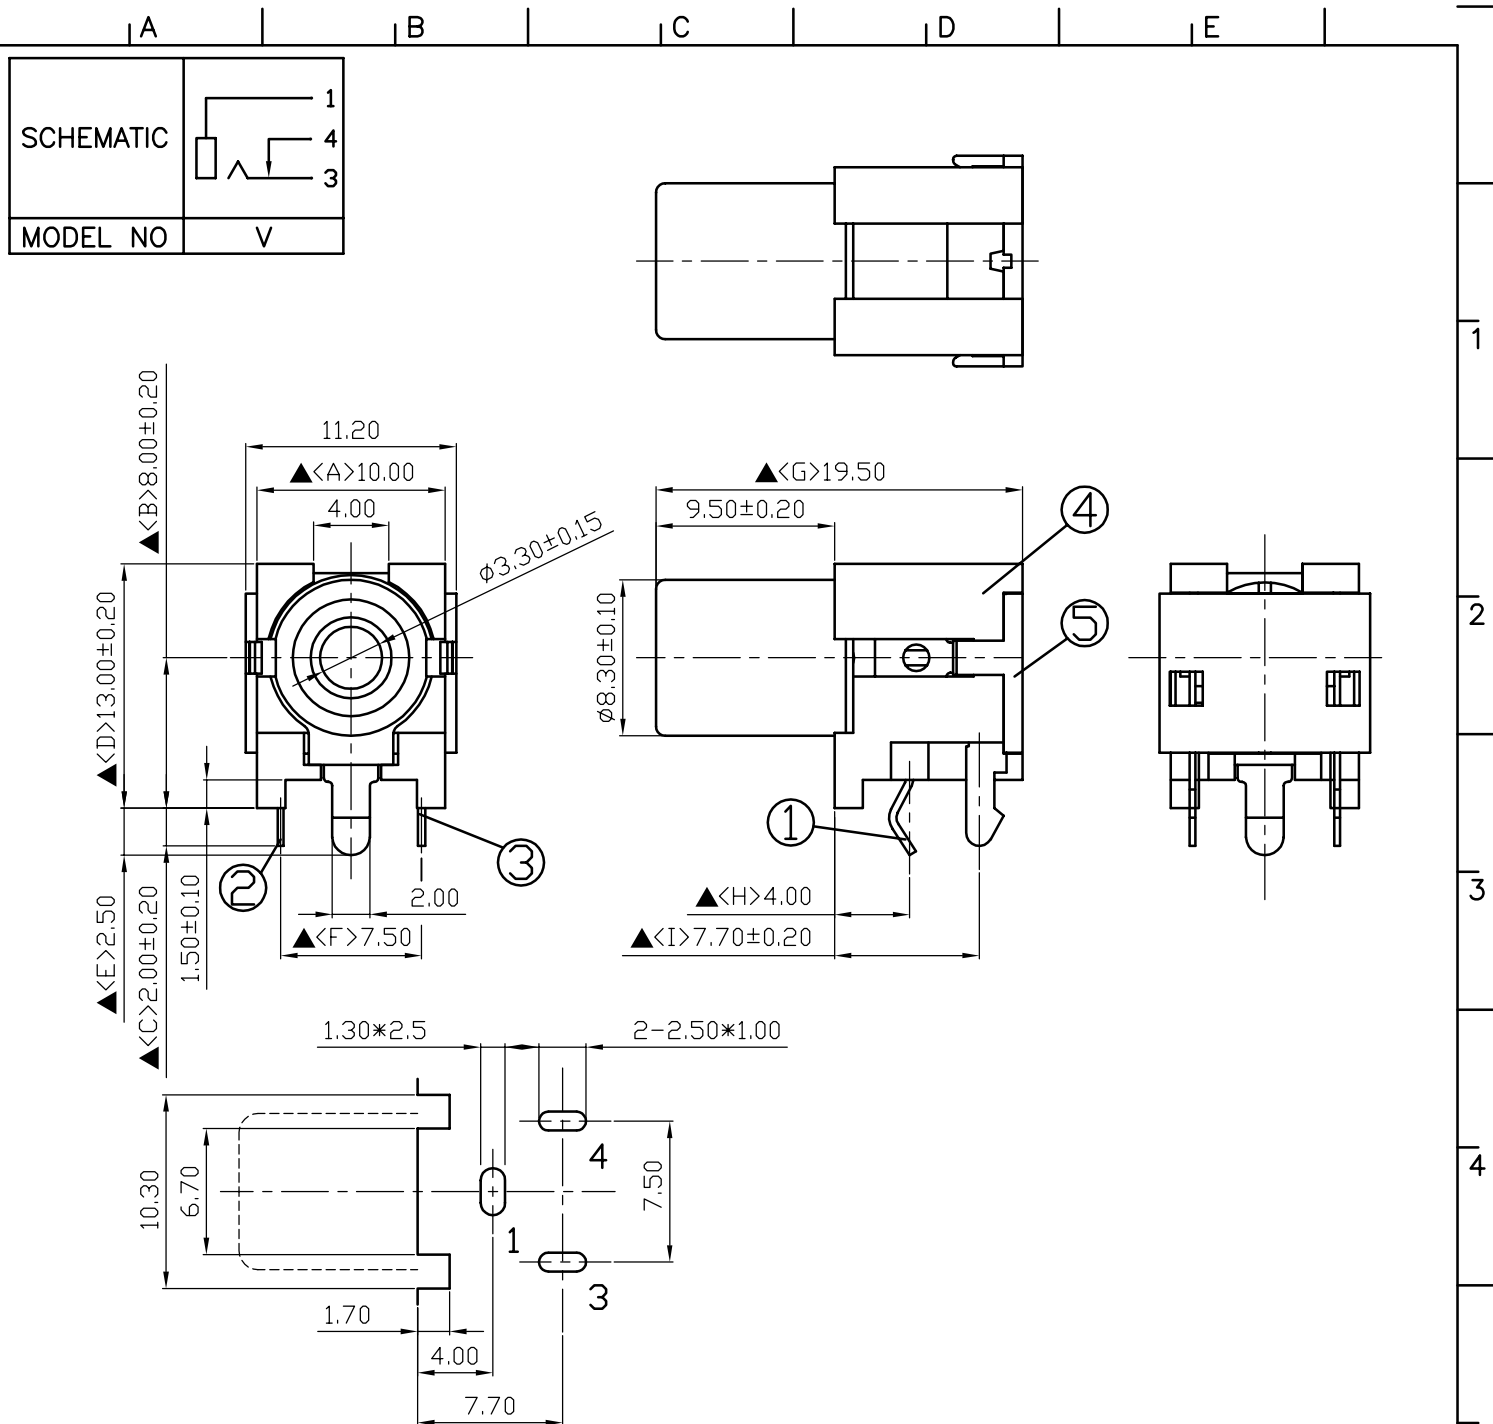


Pin Hole Layout  
(Jack Bottom View)

| 5.  | Cover                   | PBT                  | 1    | Black Color   |
|-----|-------------------------|----------------------|------|---------------|
| 4.  | Housing                 | PBT                  | 1    | Black Color   |
| 3.  | Spring Terminal         | 0.3T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Break Terminal          | 0.3T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Earth Terminal (Barrel) | 0.4T Brass           | 1    | Nickel Plated |
| NO. | Description             | Material             | Q'TY | Finish        |

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension

RoHS  
Compliant

For Reference  
僅供參考

 S.C.PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.11.2006 |     |      |      |         |

|                                              |                              |             |
|----------------------------------------------|------------------------------|-------------|
| PART NAME :PIN JACK                          | PART NUMBER:SCP625VNS10000CG | VERSION:3.0 |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm                      | SCALE:1/1   |