


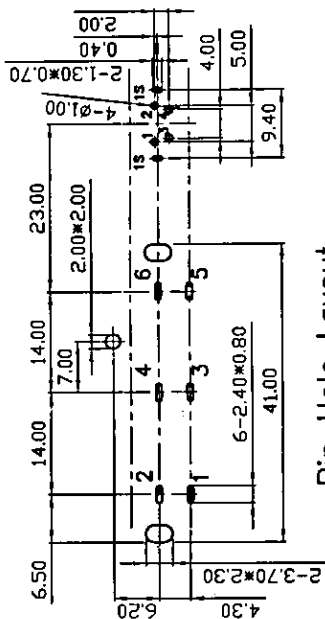

Pin Hole Layout
(Jack Bottom View)

2011-10-20

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ The Most Important Dimension

 S.C. PRECISION INDUSTRIAL CO., LTD. 旭全		DATE	DWN	CHKD	APVD	MANAGER
		10.18.2011	韩沙	张发荣	张发荣	张发荣
PART NAME :MINI DIN JACK & PIN JACK		PART NUMBER:SCP804S4BGUG814G			VERSION:5.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm	 		SCALE:1/1	