

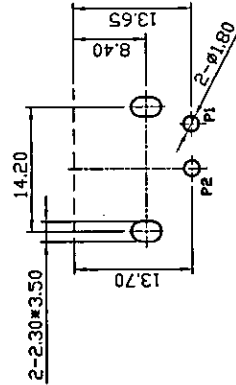
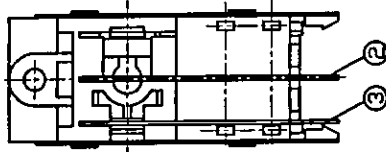


|                                                                                     |   |
|-------------------------------------------------------------------------------------|---|
| SCHEMATIC                                                                           |   |
| MODEL NO.                                                                           | U |
|  |   |

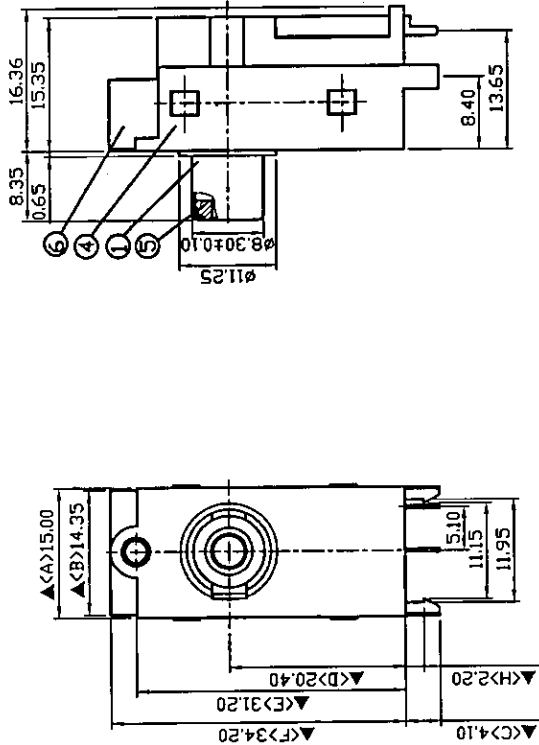

Pin Hole Layout  
Jack Bottom View




| NO. | Description          | Material   | Q'TY | Finish        |
|-----|----------------------|------------|------|---------------|
| 7.  | Cover                | PA66+33%G  | 1    | Black Color   |
| 6.  | Housing              | PA66+33%G  | 1    | Black Color   |
| 5.  | Washer               | PA66+33%G  | 1    | Yellow Color  |
| 4.  | Metal Plate          | 0.3T Brass | 1    | Nickel Plated |
| 3.  | Pin Terminal B       | 0.4T Iron  | 1    | Silver Plated |
| 2.  | Pin Terminal A       | 0.5T Brass | 1    | Silver Plated |
| 1.  | Earth Terminal(Bare) | 0.3T Iron  | 1    | Nickel Plated |



S.C. PRECISION INDUSTRIAL CO., LTD.

PART NAME: PIN JACK  
PART NUMBER: SCP8051UNS400P6G  
TOLERANCE:  $\pm 0.3\text{mm}$  UNLESS OTHERWISE SPECIFIED

| DATE         | DWN | CHKD | APVD | MANAGER    |
|--------------|-----|------|------|------------|
| 10.18.2011   | 韩沙  | 孙海峰  | 孙海峰  | 孙海峰        |
| VERSION: 5.0 |     |      |      | SCALE: 1/1 |

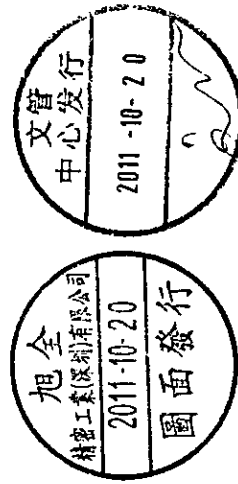

RoHS  
Pb Free Process  
SPECIFICATIONS:  
Contact Resistance :  $30\text{m}\Omega$  max  
Insulation Resistance :  $100\text{M}\Omega$  min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension