

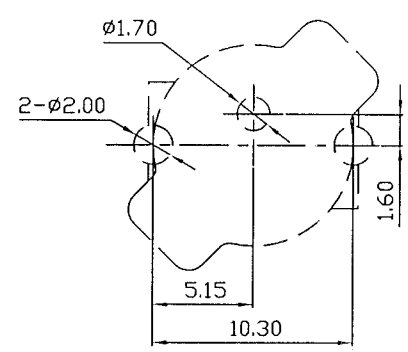
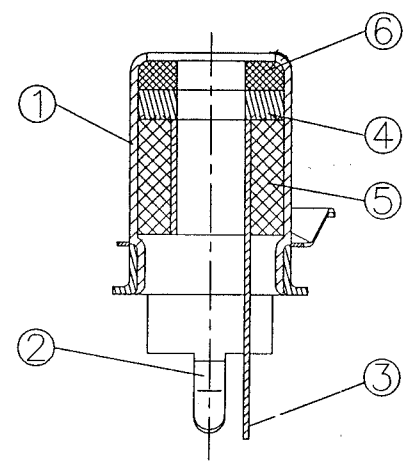


A B C D E

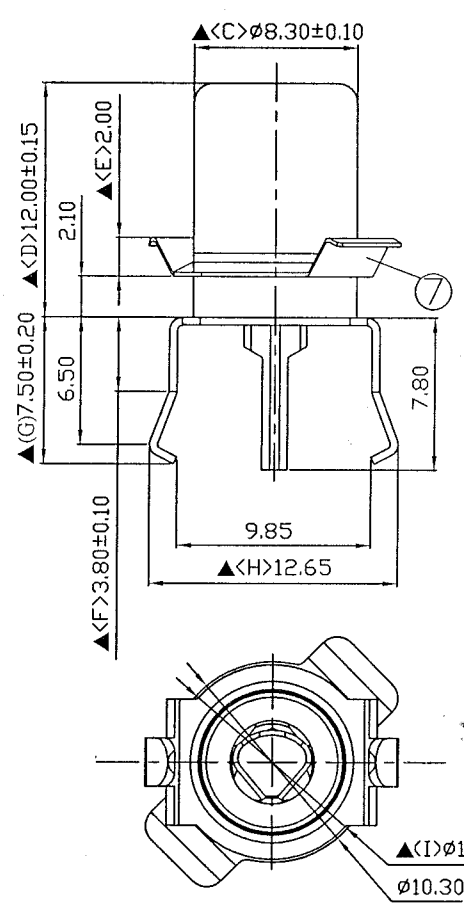

Pin Hole Layout
(Jack Bottom View)

7.	Panel Ground	0.20T Stainless Steel	1	
6.	Insulator	PBT	1	1795C Red Color
5.	Insulator	PBT	1	Black Color
4.	Insulator	Bakelite	1	Black Color
3.	Pin	0.25T Brass	1	Tin Color
2.	Mounting Bracket	0.4T Iron	1	Tin Color
1.	Phone Jack Shell	0.3T Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

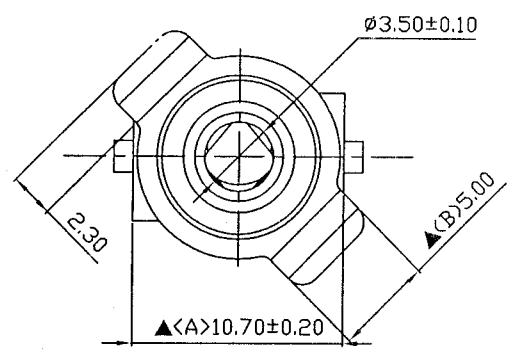

SPECIFICATIONS:
See "Details of Environment-Related Substance"
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	06.22.2005	黄志勇	李芳	李芳	李芳
PART NAME : PIN JACK		PART NUMBER: SCP606UNT2T0110			VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT: mm	SCALE: 1/1

A B C D E