

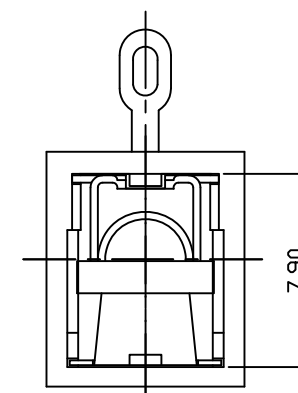
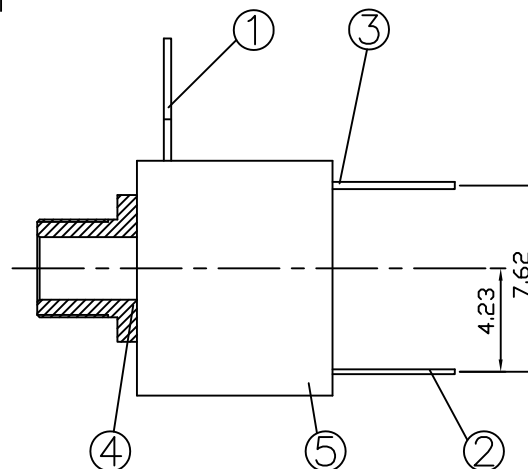
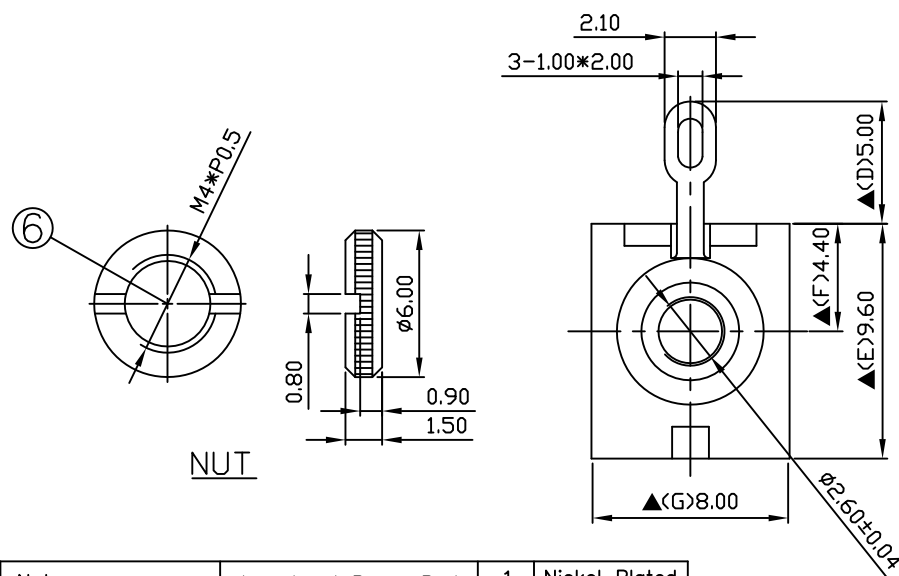
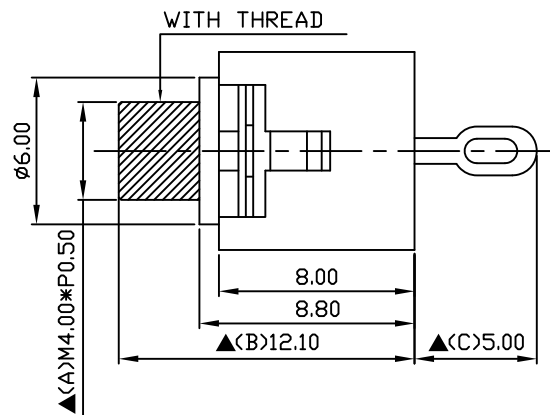


SCHEMATIC	
MODEL NO	Y



6.	Nut	Low Lead Brass Rod	1	Nickel Plated
5.	Housing	POM	1	Ivory Color
4.	Barrel (W/Thread)	Low Lead Brass Rod	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	S.C. PRECISION INDUSTRIAL CO., LTD.				DATE	DWN	CHKD	APVD	MANAGER
					08.26.2021	王平華			

PART NAME : 2.5φ PHONE JACK	PART NUMBER : SCJ210M1NYS1I00L	VERSION:3.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:/

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant