

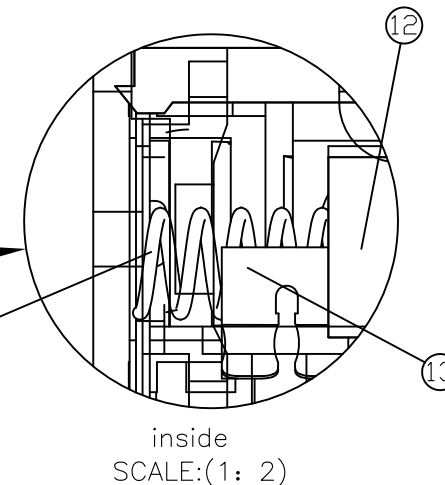
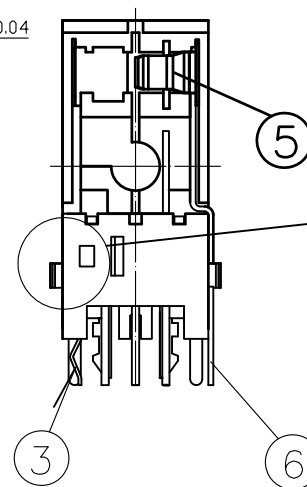
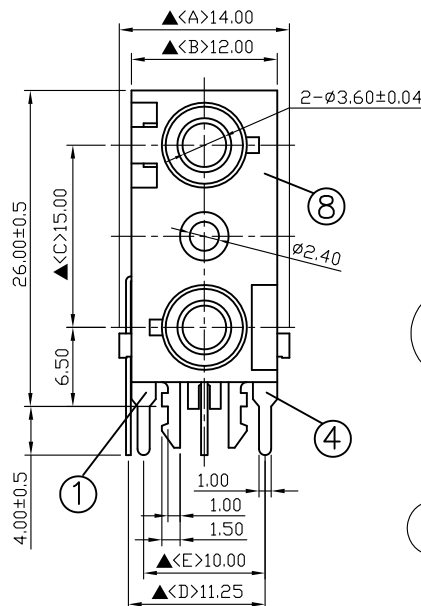
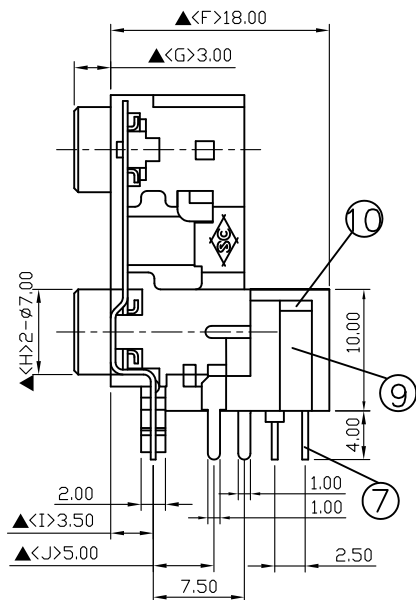



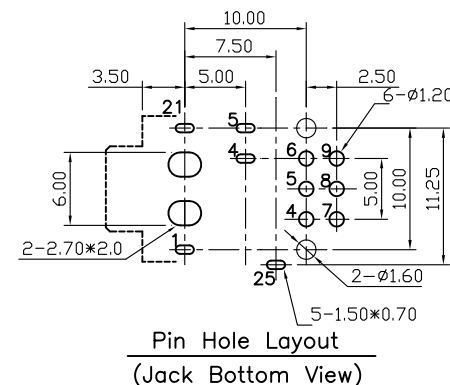

13.	Sequins	Tin Phosphor Bronze	2	
12.	Insulator	PA66+33%	1	Black Color
11.	Spring	SUS-304	1	
10.	Back Housing Cover	PA66+33%	1	Transparent
9.	Back Housing	PA66+33%	1	Black Color
8.	Housing	PBT	1	Black Color
7.	Switch Pin	0.4T Brass	6	Silver Plated
6.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
5.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
4.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
3.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
2.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.03.2024	王放策			

PART NAME : 3.5 ϕ PHONE JACK PART NUMBER : SCJ352P00YS0B00G VERSION:4.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED UNIT:mm SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant