

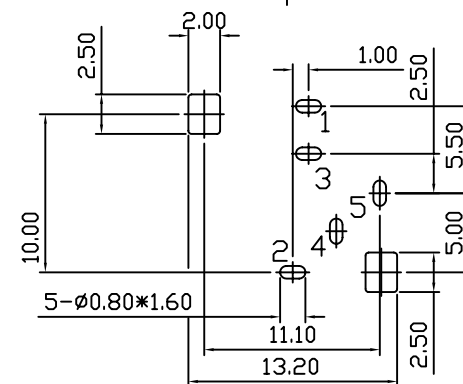
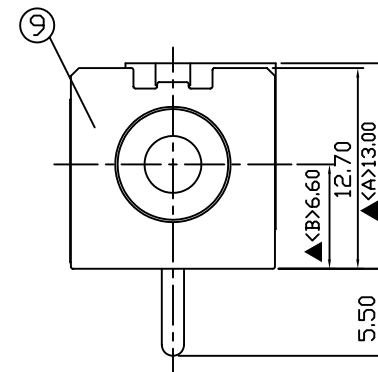
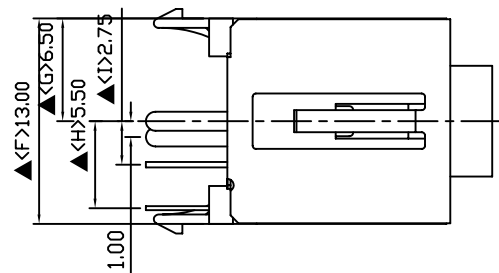
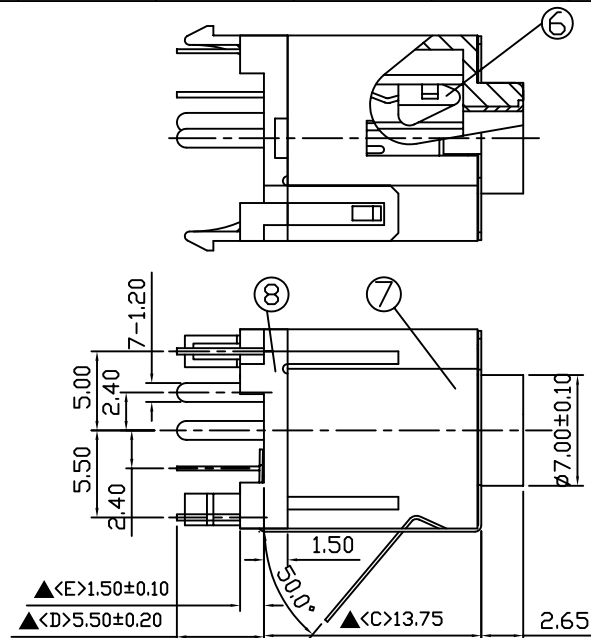


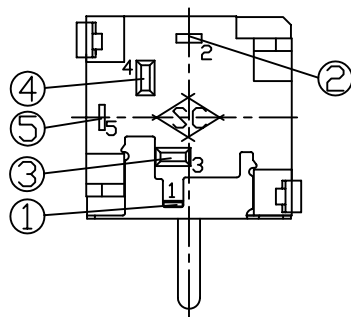

Pin Hole Layout
(Jack Bottom View)

9.	Metal Plate	0.2T Phosphor Bronze	1	Nickel Plated
8.	Back Cover	PBT+15%G	1	Black Color
7.	Housing	PBT	1	Black Color
6.	Insulator	POM	1	White Color
5.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
4.	Separator Spring	0.3T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2012				

RoHS
Compliant

For Reference
僅供參考


PART NAME : 3.5Ø PHONE JACK

PART NUMBER: SCJ339P00ES0B00G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:/

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension