

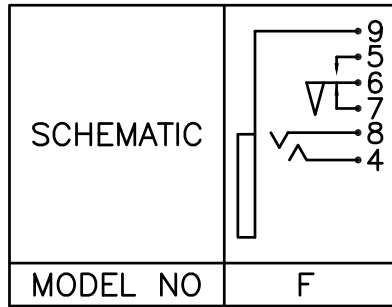





NUT

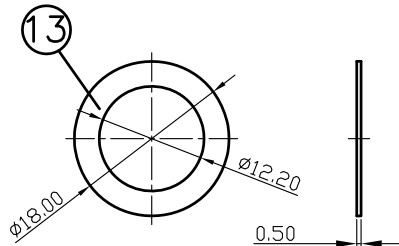

WASHER

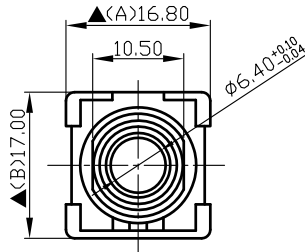

M12XP1.0 METRIC THREAD

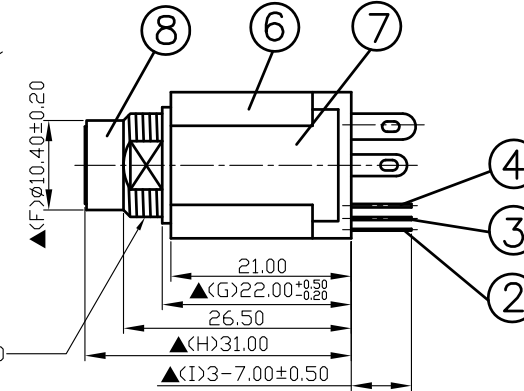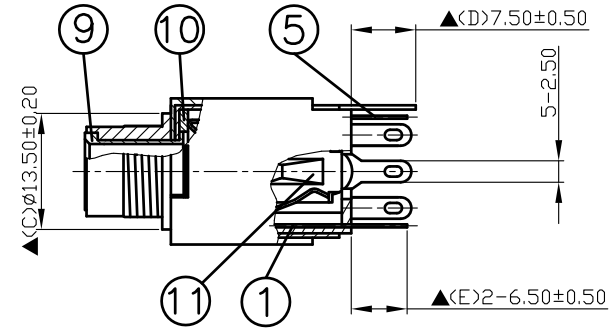

13.	Washer	0.5T Steel	1	Nickel Plated
12.	Nut	2.0T Steel	1	Nickel Plated
11.	Insulator	POM	1	Ivory Color
10.	Insulator	Red Vulcanited Fibre	1	Red Color
9.	Bushing	Low Lead Brass Rod	1	Nickel Plated
8.	Barrel(W/Thread)	POM	1	Black Color
7.	Cover	0.5T Steel	1	Nickel Plated
6.	Housing	POM	1	Black Color
5.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
2.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.17.2021	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ610R0NFS1B11L

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant