






A

B


C

D


E

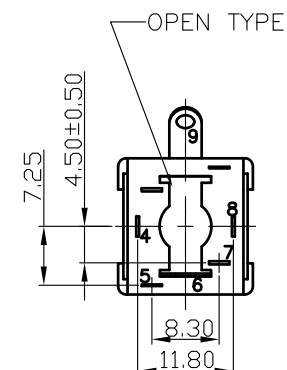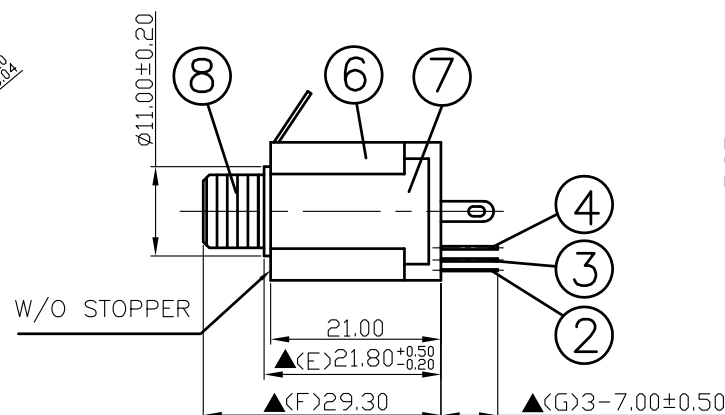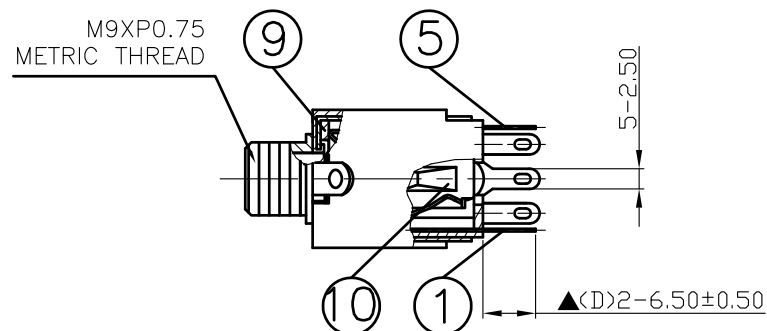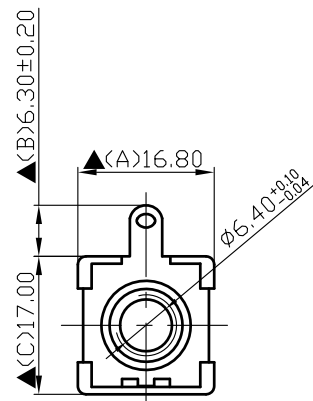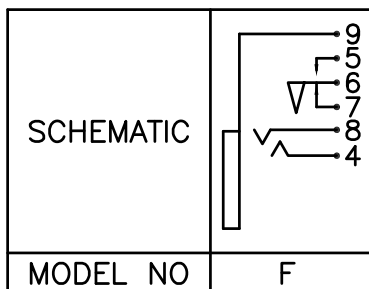

12.	Washer	0.5T Steel	1	Nickel Plated
11.	Nut	2.0T Steel	1	Nickel Plated
10.	Insulator	POM	1	Ivory Color
9.	Insulator	Red Vulcanited Fibre	1	Red Color
8.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
7.	Cover	0.5T Steel	1	Nickel Plated
6.	Housing	POM	1	Black Color
5.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
2.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish



NUT

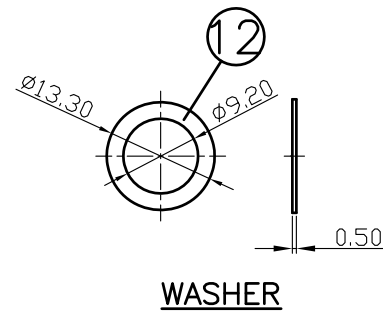

WASHER



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.05.2022	王平華			

For Redference
僅供參考RoHS&SVHC
Compliant

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NFS3B11L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension