

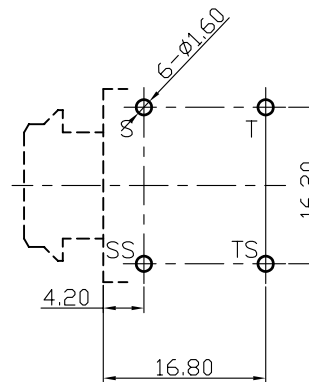

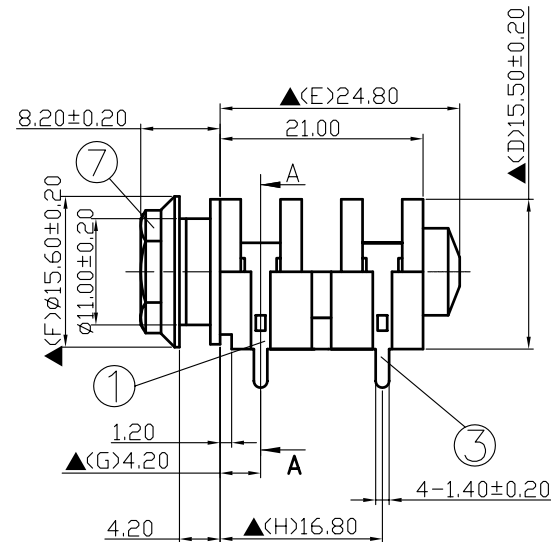
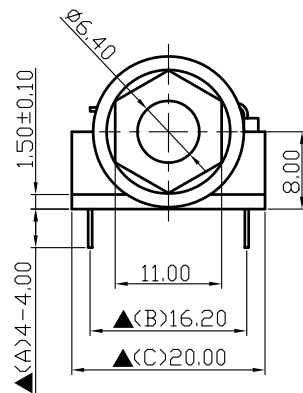


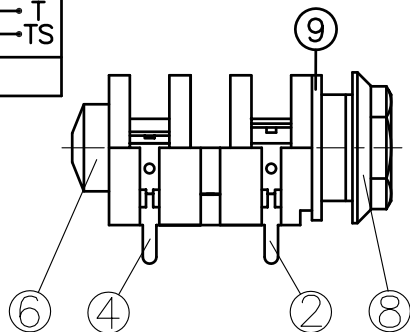

Pin Hole Layout
(Jack Bottom View)

9.	Washer	PAPER SHEET t1.0	1	Red Color
8.	Bushing	PA66	1	Black Color
7.	Nut-Metal	Brass	1	Nickel Plated
6.	Housing	PA66	1	Black Color
5.	Bottom Spring	0.4T Phosphor Bronze	1	Tin Plated
4.	Tip Shunt	0.4T Bronze	1	Tin Plated
3.	Tip Spring	0.4T Phosphor Bronze	1	Tin Plated
2.	Sleeve Shunt	0.4T Bronze	1	Tin Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Tin Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.12.2011				

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ647R5NDT0BP0G

VERSION: 1.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

RoHS
Pb Free Process

For Reference
僅供參考

SPECIFICATIONS:

See "Details of Environment-Related Substance"
Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: Δ : The Most Important Dimension