

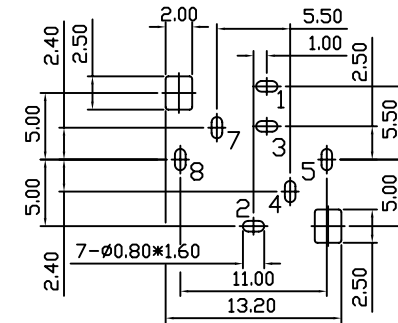
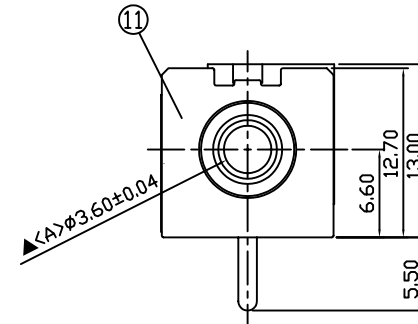
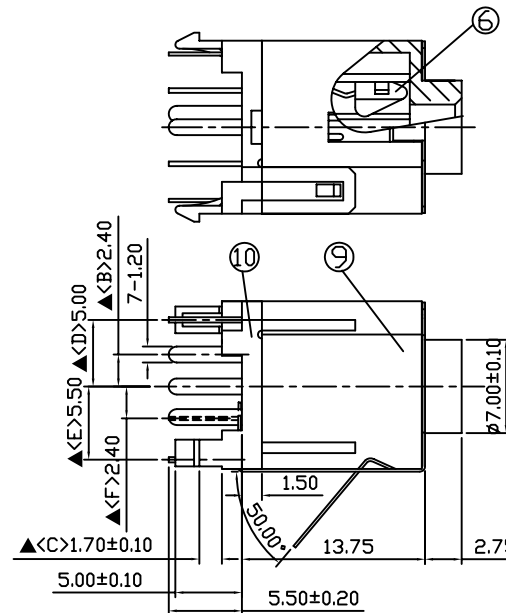


SCHEMATIC	
MODEL NO.	C



Pin Hole Layout
(Jack Bottom View)

11.	Metal Plate	0.2T Phosphor Bronze	1	Nickel Plated
10.	Back Cover	PBT+15%G	1	Black Color
9.	Housing	PBT	1	Black Color
8.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
7.	Separator Terminal	0.3T Brass	1	Silver Plated
6.	Insulator	POM	2	White Color
5.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
4.	Separator Spring	0.3T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	01.06.2012				

PART NAME : 3.5ø PHONE JACK	PART NUMBER: SCJ339P00CS0B00G	VERSION: 2.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: /

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考