




SCHEMATIC	
MODEL NO.	B

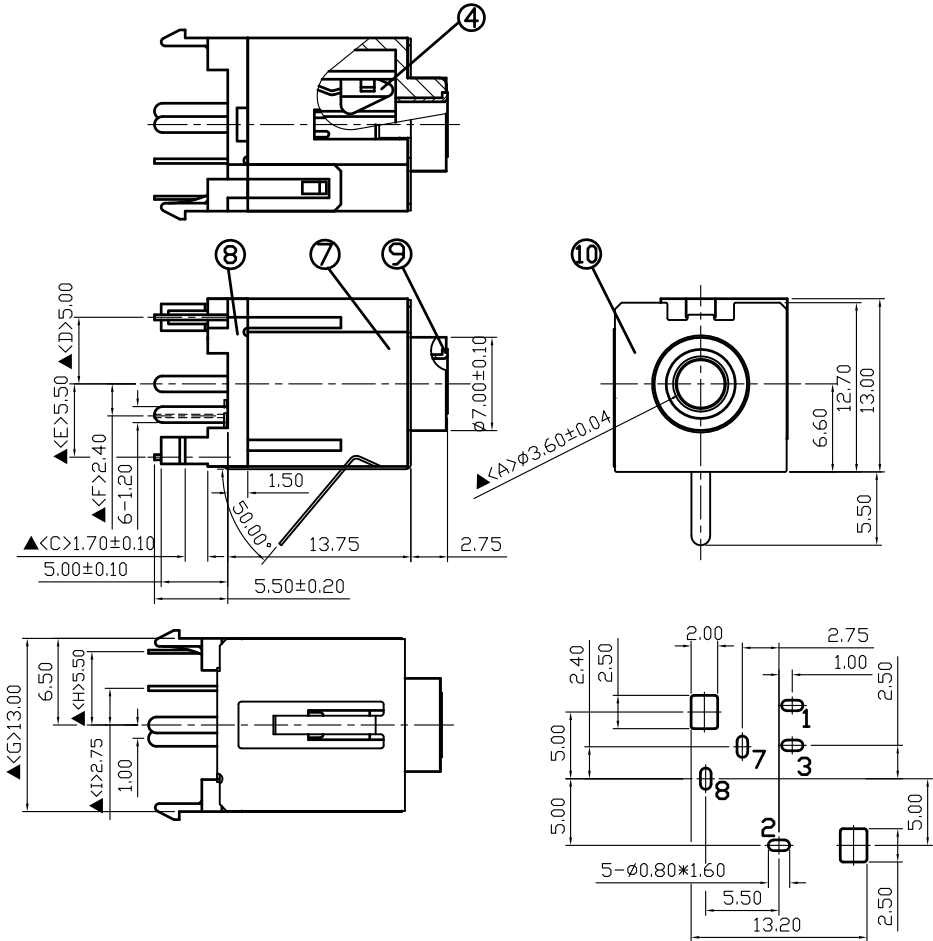

Pin Hole Layout
(Jack Bottom View)

10.	Metal Plate	0.2T Phosphor Bronze	1	Nickel Plated
9.	Barrel	Low lead Brass Rod	1	Nickel Plated
8.	Back Cover	PBT	1	577C Green Color
7.	Housing	PBT	1	577C Green Color
6.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
5.	Separator Terminal	0.3T Brass	1	Silver Plated
4.	Insulator	POM	1	White Color
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD

DATE	DWN	CHKD	APVD	MANAGER
09.16.2020	王平華			

PART NAME : 3.5ø PHONE JACK

PART NUMBER: SCJ339R0NBS0G04L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Reference
僅供參攷

RoHS&SVHC
Compliant