


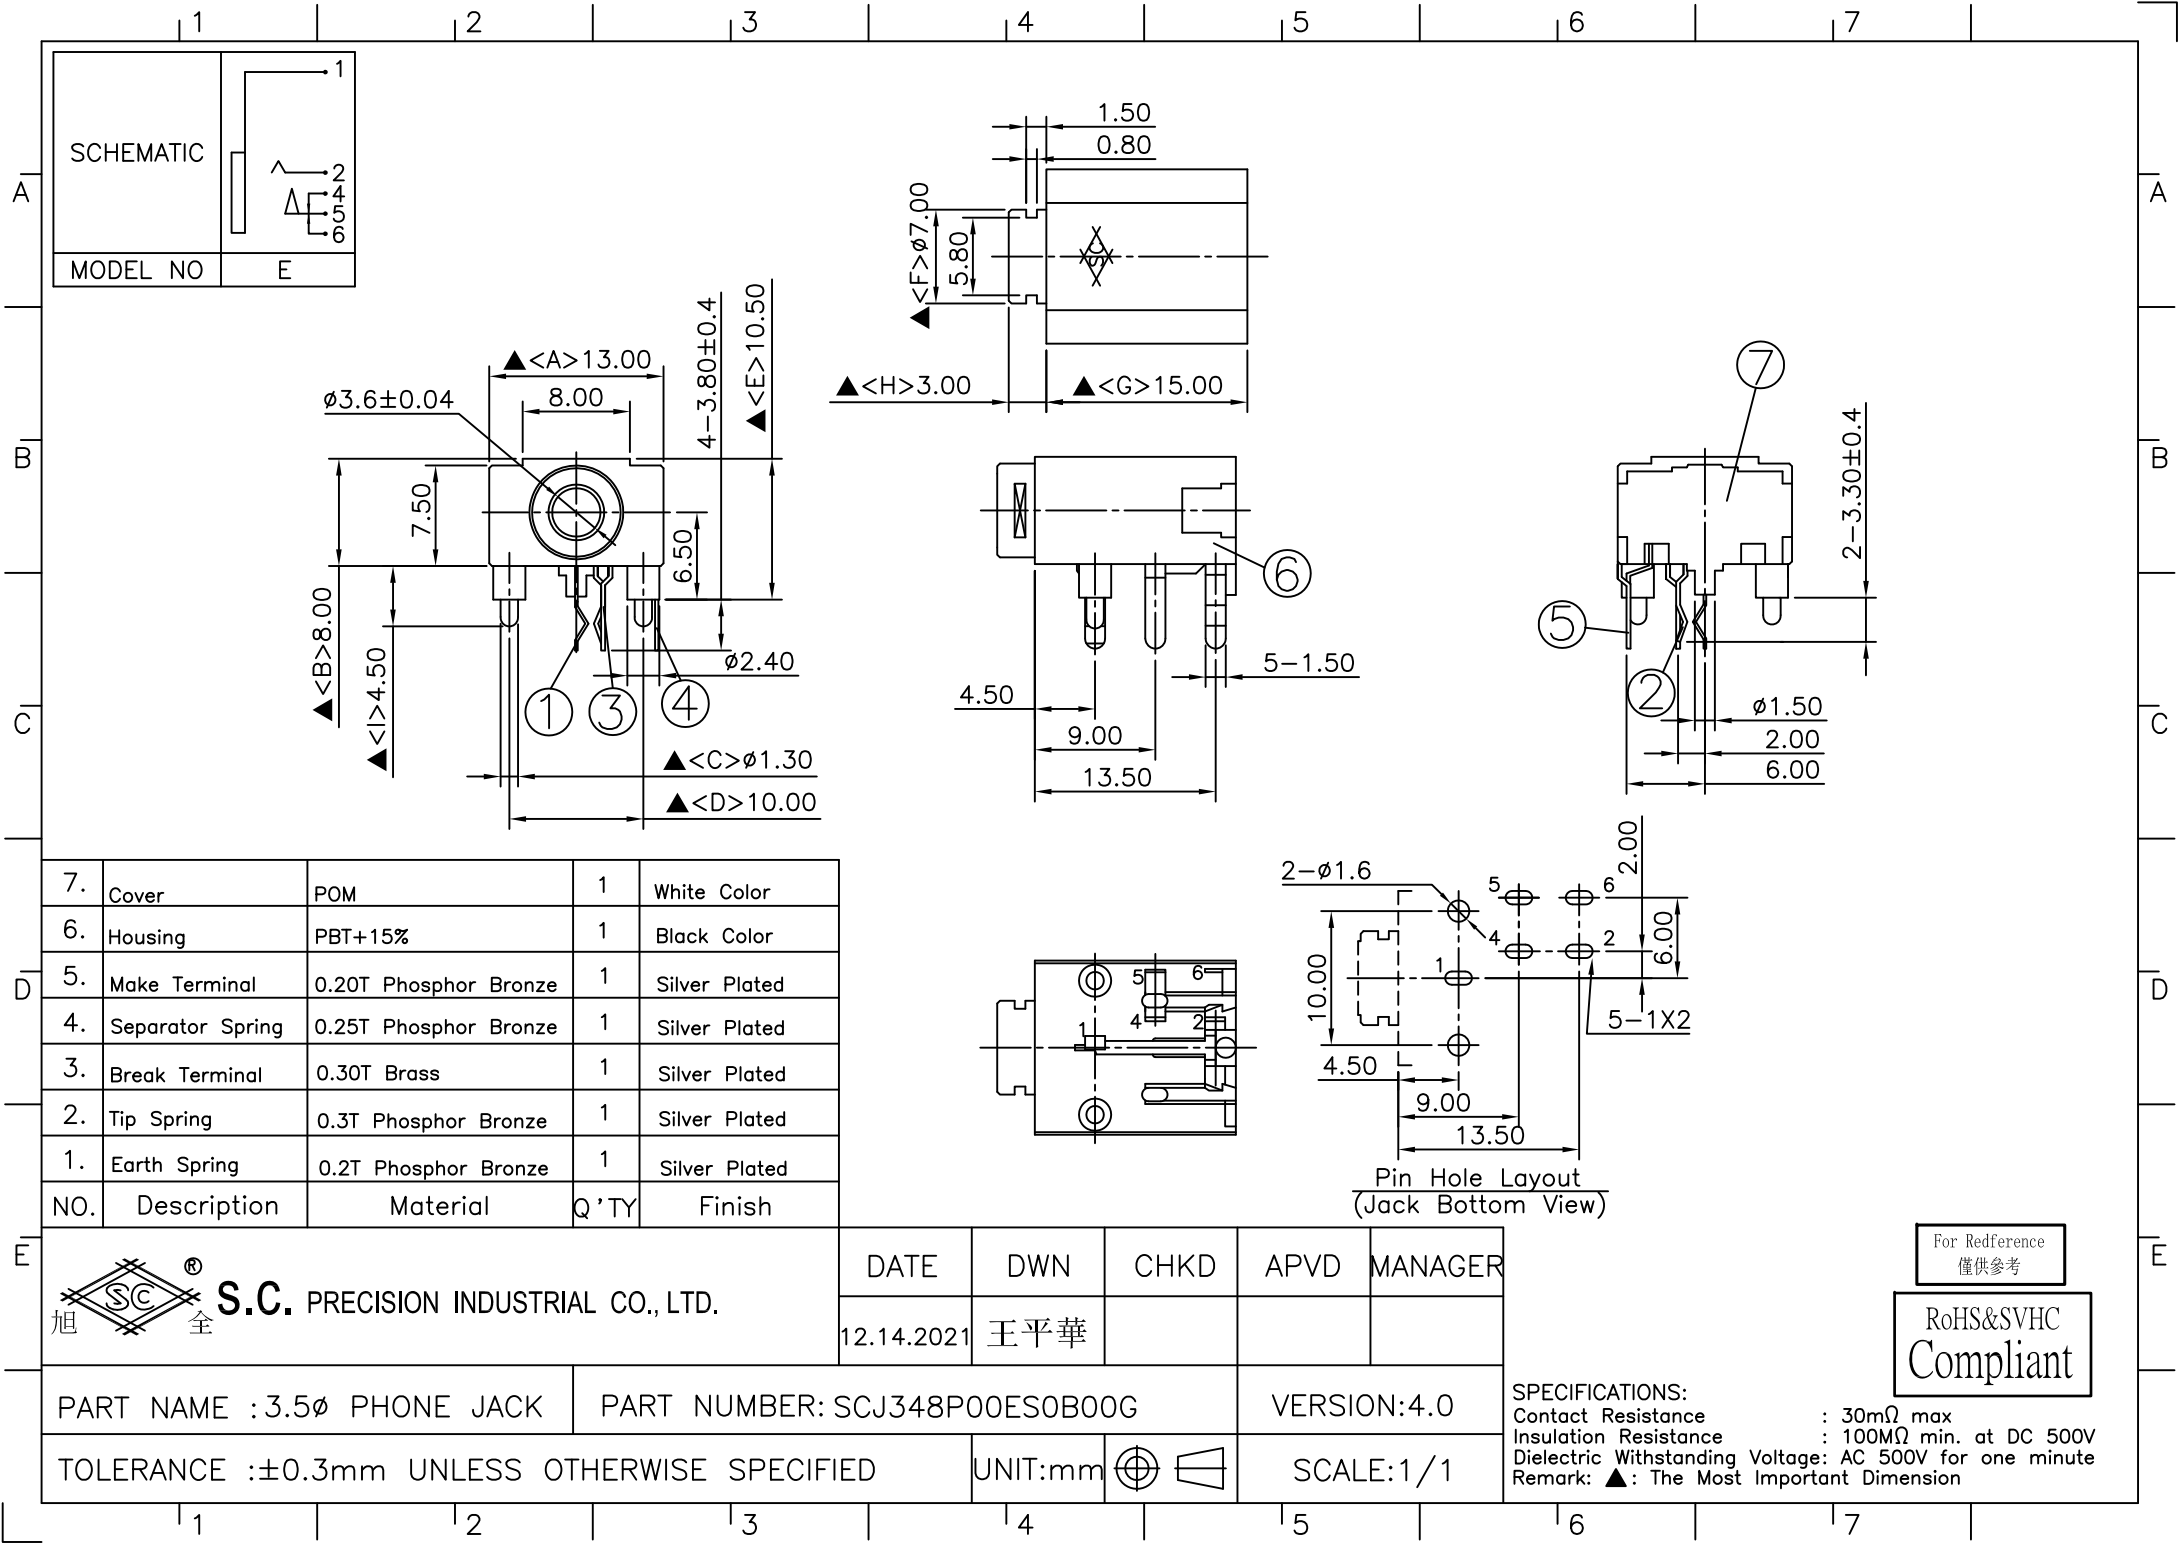

7.	Cover	POM	1	White Color
6.	Housing	PBT+15%	1	Black Color
5.	Make Terminal	0.20T Phosphor Bronze	1	Silver Plated
4.	Separator Spring	0.25T Phosphor Bronze	1	Silver Plated
3.	Break Terminal	0.30T Brass	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.				DATE	DWN	CHKD	APVD	MANAGER
旭全				12.14.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER: SCJ348P00ES0B00G	VERSION: 4.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant