
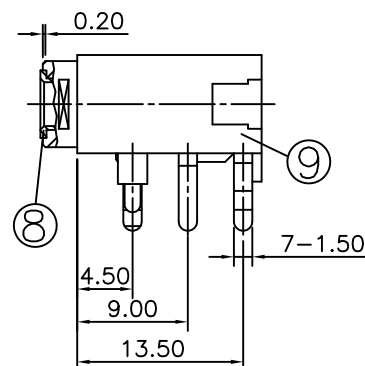
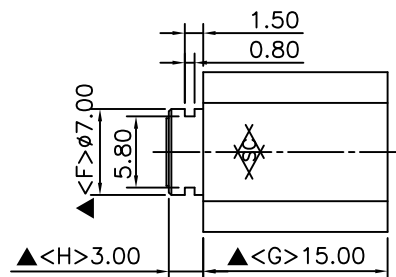
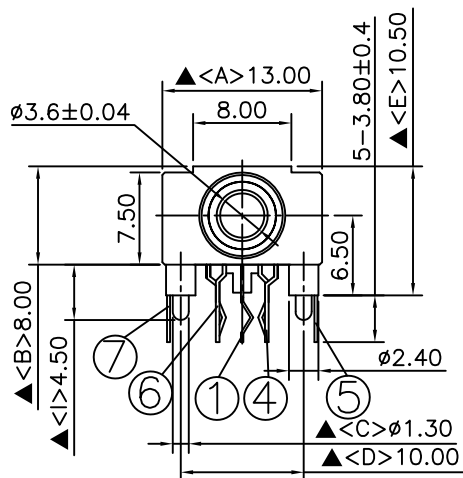

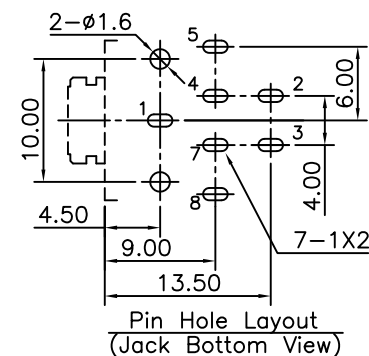


10.	Cover	POM	1	White Color
9.	Housing	PBT+15%	1	Black Color
8.	Barrel	Low Lead Brass Rod	1	Nickel Plated
7.	Separator Spring	0.25T Phosphor Bronze	1	Silver Plated
6.	Break Terminal	0.3T Brass	1	Silver Plated
5.	Separator Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.3T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	12.13.2021	王平華			

PART NAME :3.5φ PHONE JACK	PART NUMBER:SCJ348R0NCS0B00L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant