

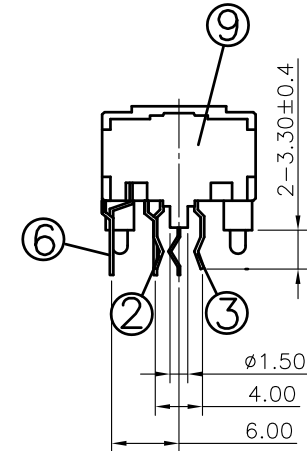
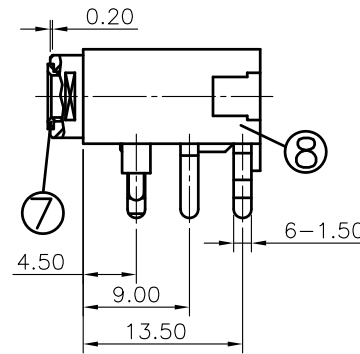
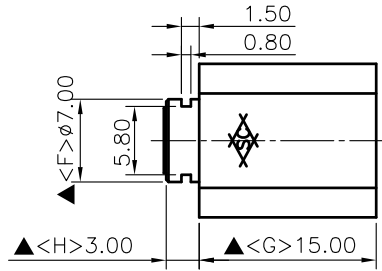
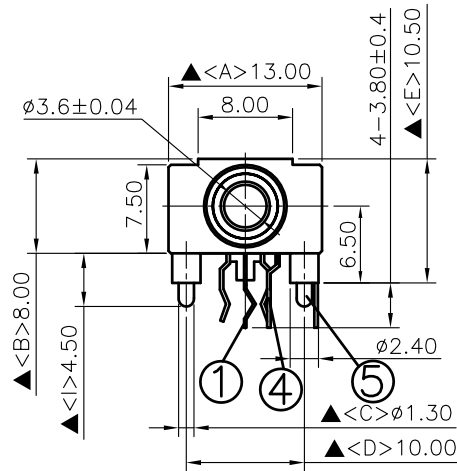



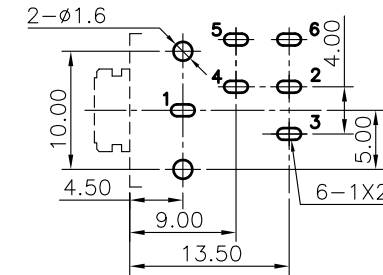

9.	Cover	POM	1	White Color
8.	Housing	PBT+15%	1	Black Color
7.	Barrel	Low Lead Brass Rod	1	Nickel Plated
6.	Make Terminal	0.20T Phosphor Bronze	1	Silver Plated
5.	Separator Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.3T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q TY	Finish



Pin Hole Layout
(Jack Bottom View)

S.C. PRECISION INDUSTRIAL CO., LTD.			
DATE	DWN	CHKD	APVD
12.14.2021	王平華		

MANAGER

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER: SCJ348RONIS0B00L	VERSION: 1.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:

- Contact Resistance : $30\text{m}\Omega$ max
- Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
- Dielectric Withstanding Voltage: AC 500V for one minute
- Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant