

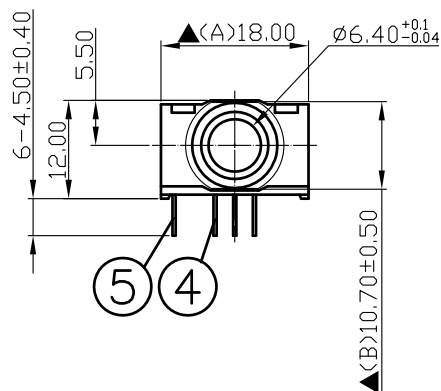
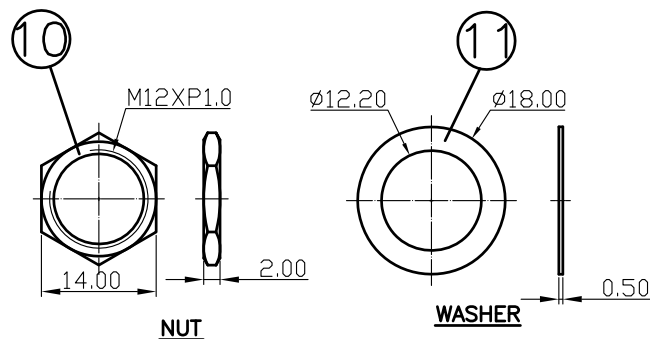
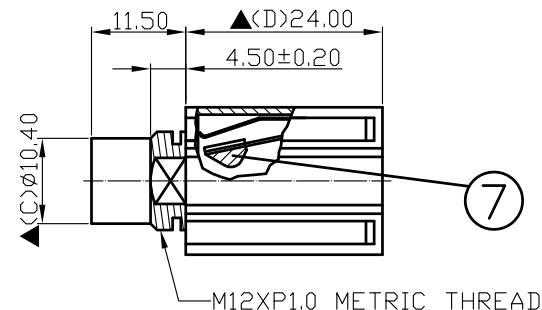
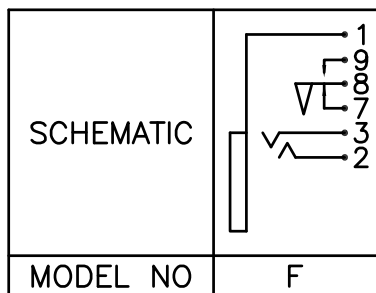


11.	Washer	0.5T Steel	1	Nickel Plated
10.	Nut	2.0T Steel	1	Nickel Plated
9.	Cover	PC	1	Transparent
8.	Housing	PBT+15%	1	Black Color
7.	Insulator	POM	1	Black Color
6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

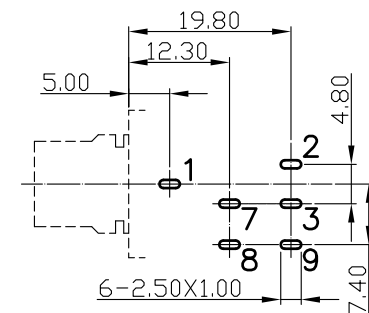

Pin Hole Layout
(Jack Bottom View)

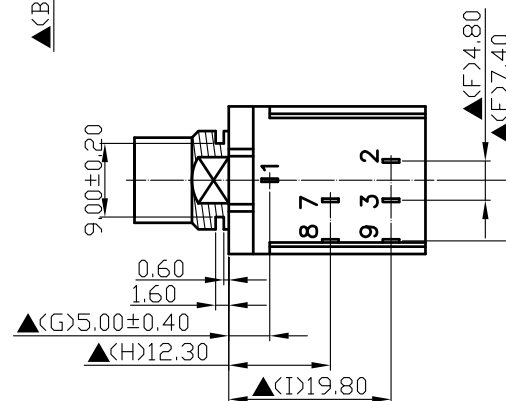

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.10.2022	王平華			

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ620P50FS1B00G

VERSION: 4.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max

Insulation Resistance : 100M Ω min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: Δ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant