
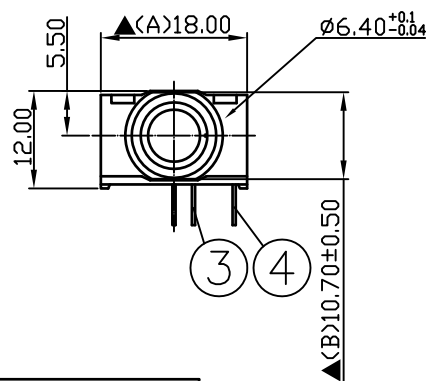
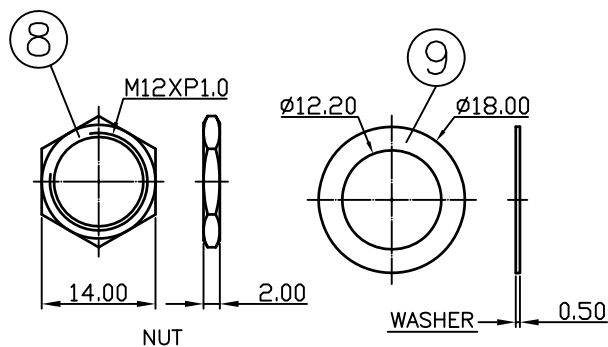
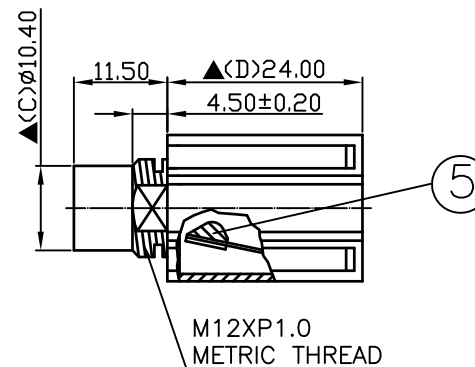

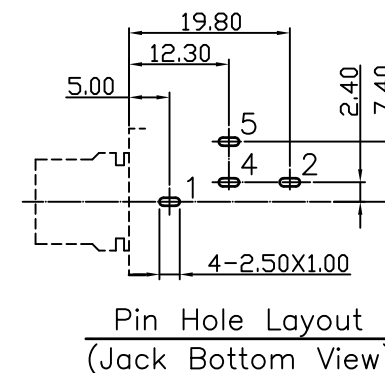


9.	Washer	0.5T Steel	1	Nickel Plated
8.	Nut	2.0T Steel	1	Nickel Plated
7.	Cover	PC	1	Transparent
6.	Housing	PBT+15%	1	Black Color
5.	Insulator	POM	1	Black Color
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

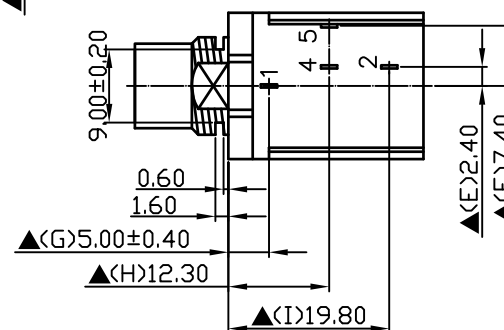

		DATE	DWN	CHKD	APVD	MANAGER
		01.10.2022	王平華			

PART NAME : 6.3 ϕ PHONE JACK	PART NUMBER: SCJ620P50GS1B00G	VERSION: 4.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant