

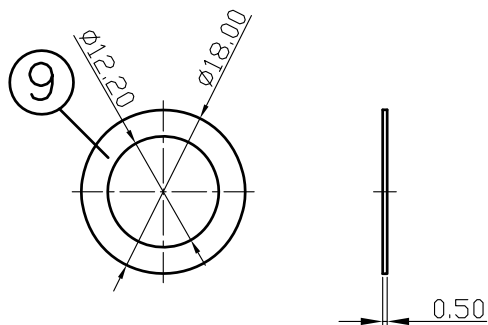
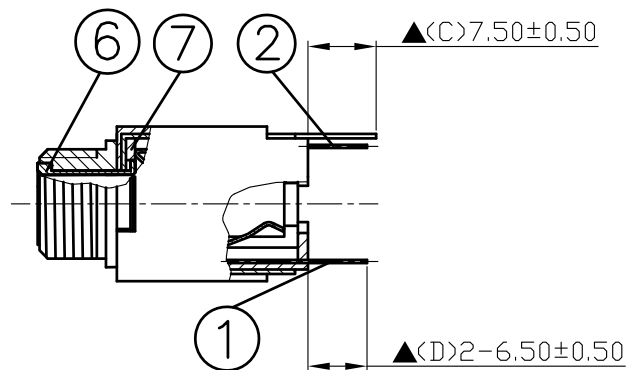



NUT

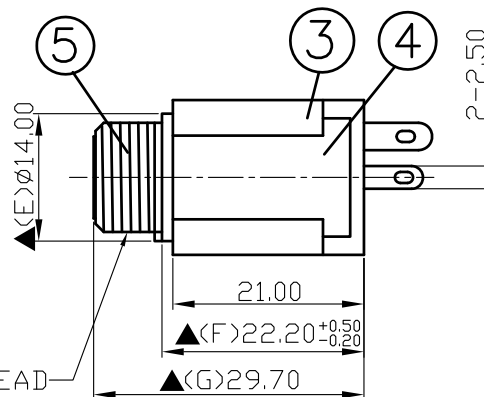

WASHER

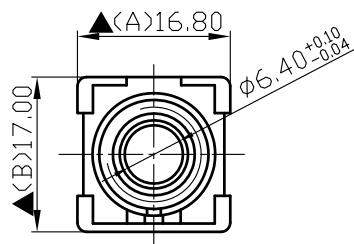

9.	Washer	0.5T Steel	1	Nickel Plated
8.	Nut	2.0T Steel	1	Nickel Plated
7.	Insulator	Red Vulcanited Fibre	1	Red Color
6.	Bushing	Low Lead Brass Rod	1	Nickel Plated
5.	Barrel(W/Thread)	POM	1	Black Color
4.	Cover	0.5T Steel	1	Nickel Plated
3.	Housing	POM	1	Black Color
2.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

M12XP1.0 METRIC THREAD



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.19.2021	王平華			

PART NAME :6.3 ϕ PHONE JACK

PART NUMBER:SCJ610R3NAS1B11L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant