


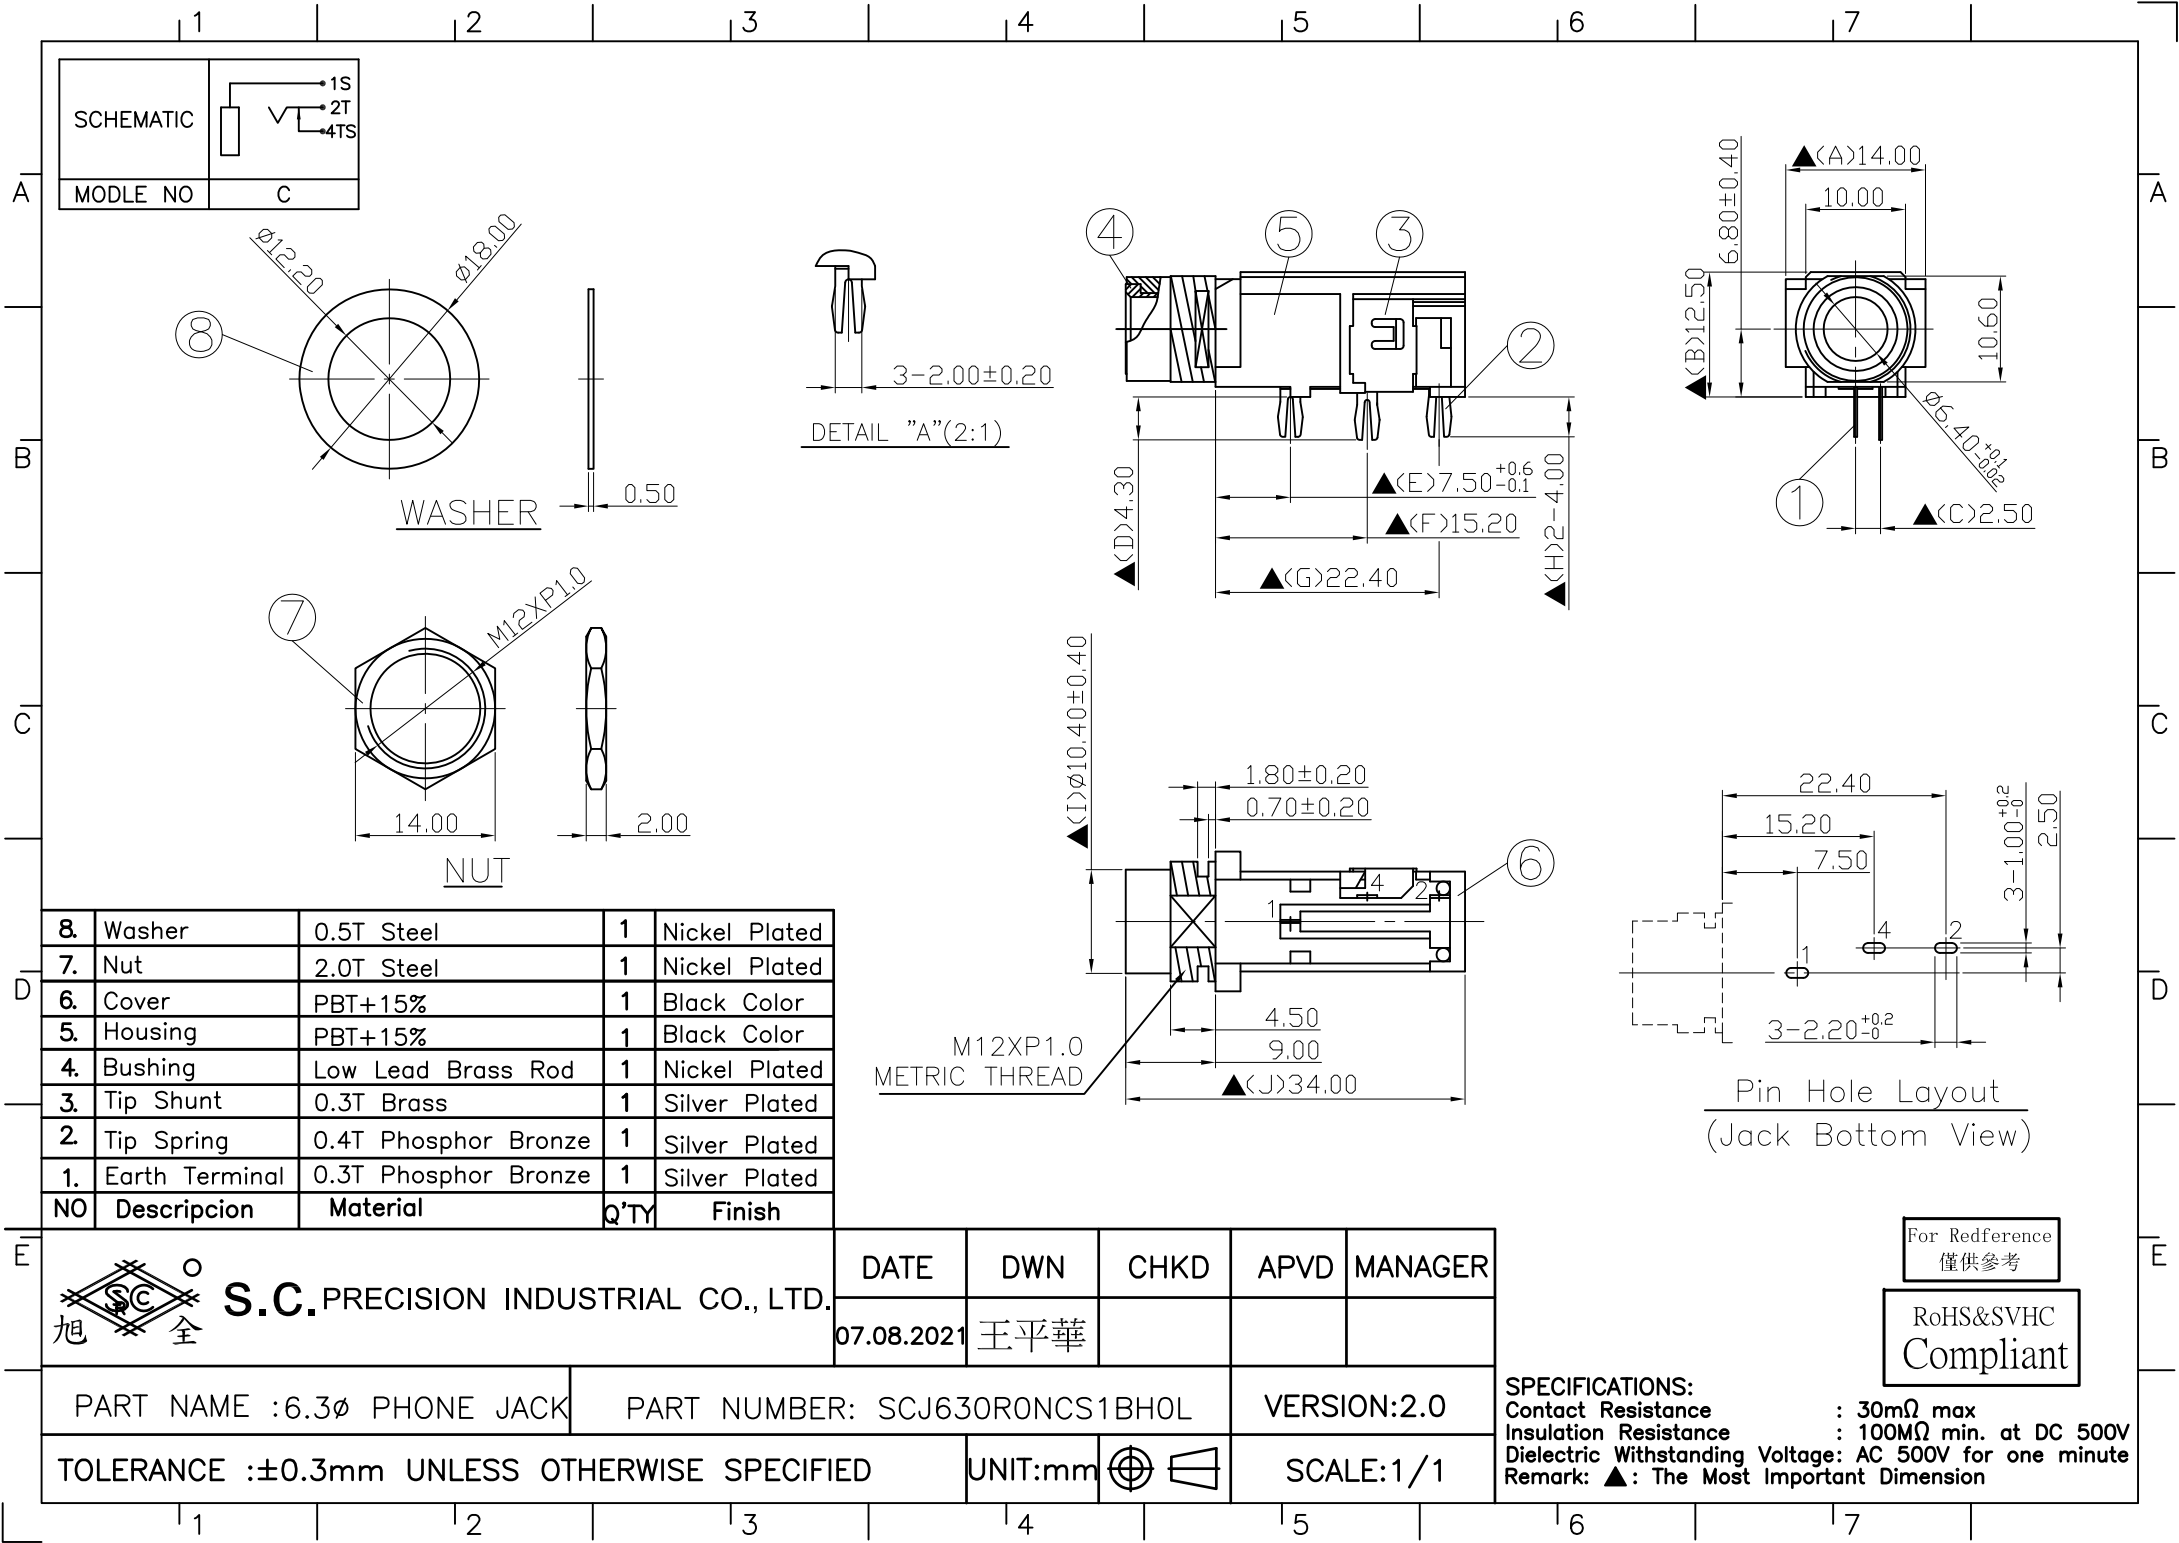

SCHEMATIC

MODLE NO

C

8.	Washer	0.5T Steel	1	Nickel Plated
7.	Nut	2.0T Steel	1	Nickel Plated
6.	Cover	PBT+15%	1	Black Color
5.	Housing	PBT+15%	1	Black Color
4.	Bushing	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Shunt	0.3T Brass	1	Silver Plated
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO	Descripcion	Material	Q'TY	Finish

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

07.08.2021

王平華

PART NAME :6.3ø PHONE JACK

PART NUMBER: SCJ630R0NCS1BH0L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲: The Most Important Dimension