






NUT





WASHER

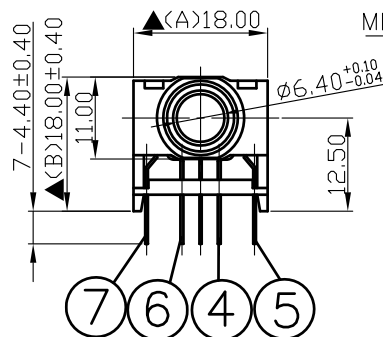

M12XP1.0
METRIC THREAD

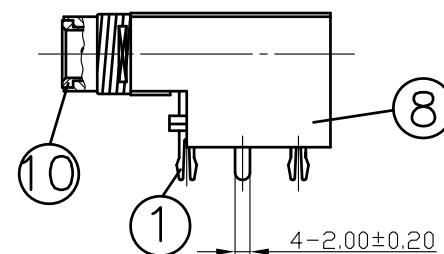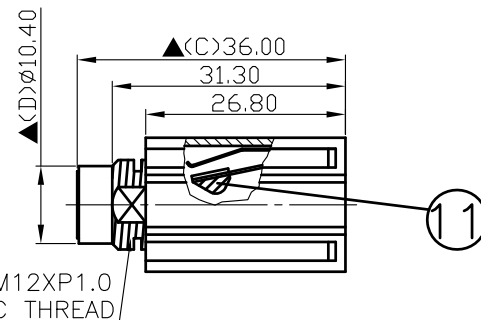

13.	Washer	0.5T Steel	1	Nickel Plated
12.	Nut	2.0T Steel	1	Nickel Plated
11.	Insulator	POM	2	Black Color
10.	Bushing	Low Lead Brass Rod	1	Nickel Plated
9.	Cover	POM	1	Black Color
8.	Housing	PBT	1	Black Color
7.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
6.	Transfer Terminal	0.4T Brass	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

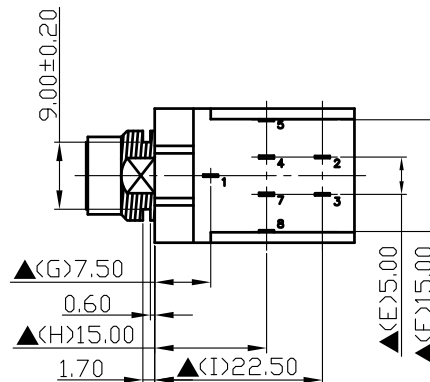

Pin Hole Layout
(Jack Bottom View)



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.26.2022	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ634R0NCS1B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant