

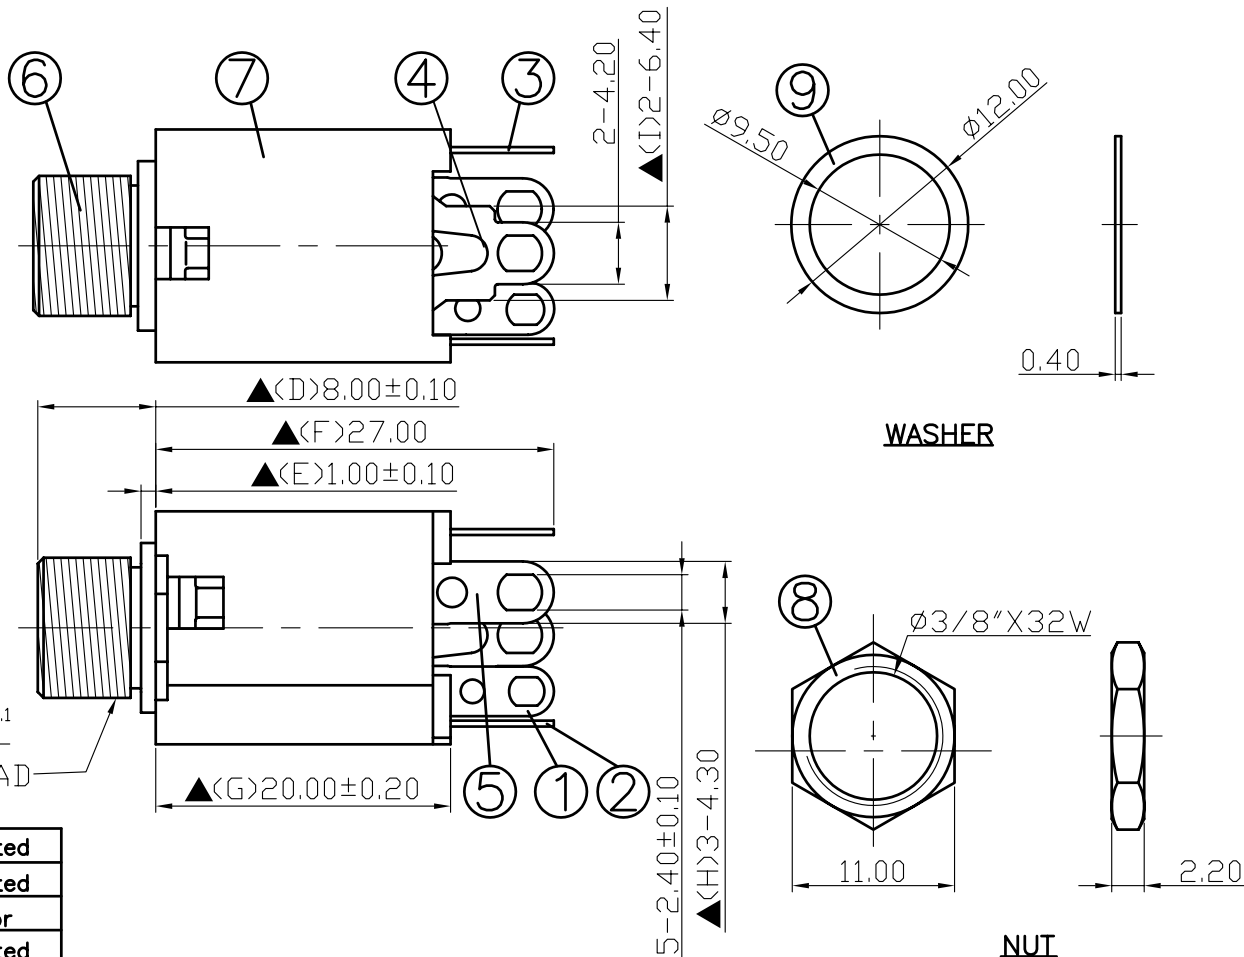


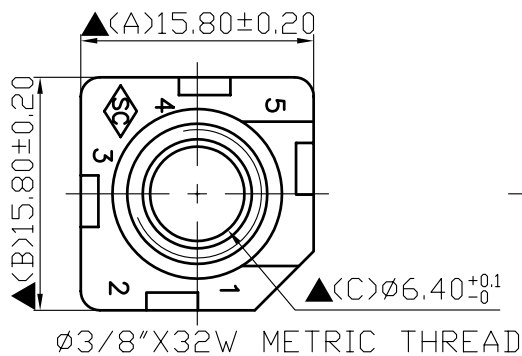

| 9.  | Washer         | 0.4T Brass           | 1     | Nickel Plated |
|-----|----------------|----------------------|-------|---------------|
| 8.  | Nut            | 2.2T Brass           | 1     | Nickel Plated |
| 7.  | Housing        | PBT                  | 1     | Black Color   |
| 6.  | Barrel         | Brass                | 1     | Nickel Plated |
| 5.  | Ring Shunt     | 0.4T Brass           | 1     | Silver Plated |
| 4.  | Ring Spring    | 0.4T Phosphor Bronze | 1     | Silver Plated |
| 3.  | Tip Spring     | 0.4T Phosphor Bronze | 1     | Silver Plated |
| 2.  | Tip Shunt      | 0.4T Brass           | 1     | Silver Plated |
| 1.  | Earth Terminal | 0.4T Brass           | 1     | Silver Plated |
| NO. | Description    | Material             | Q 'TY | Finish        |

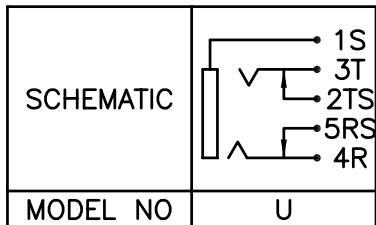

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

10.12.2011

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ650M1NUS4B00G

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

RoHS  
Compliant

For Reference  
僅供參考

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension