




A

B


C

D



E

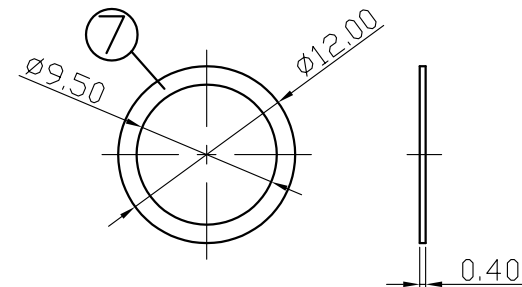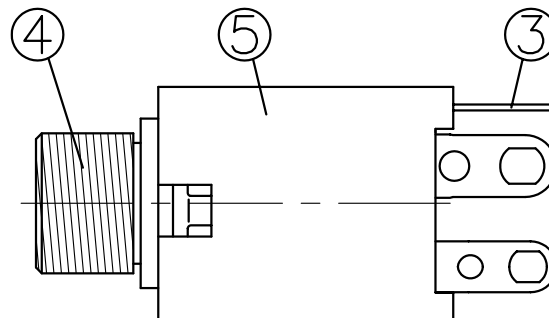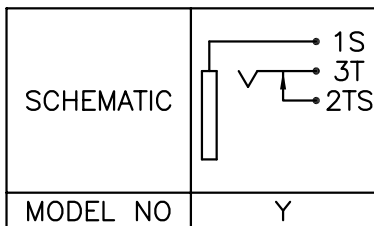

WASHER

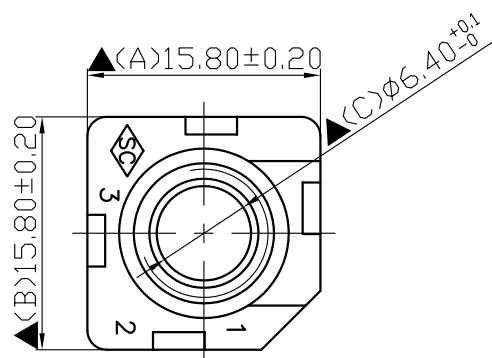

ø3/8"X32W METRIC THREAD

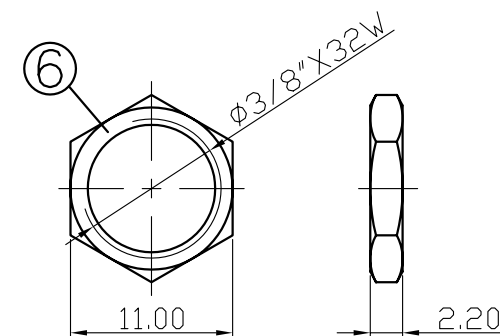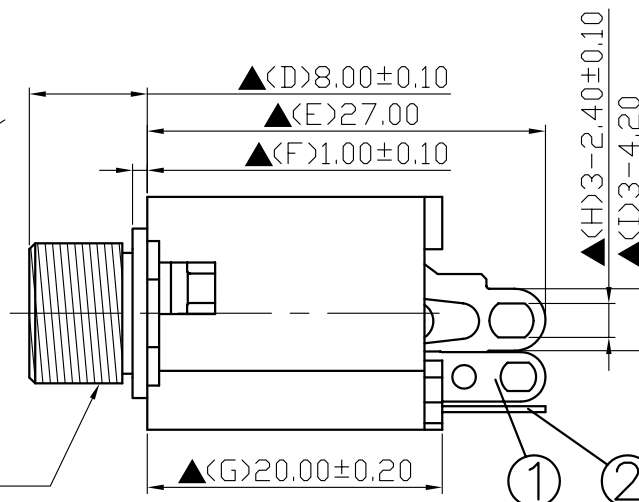

NUT

7.	Washer	0.4T Brass	1	Nickel Plated
6.	Nut	2.2T Brass	1	Nickel Plated
5.	Housing	PBT	1	Black Color
4.	Barrel	Brass	1	Nickel Plated
3.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Tip Shunt	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.12.2011				


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ650M1NYS4B00G

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

RoHS
CompliantFor Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension