






Washer

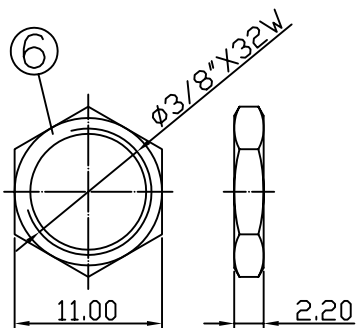

Nut

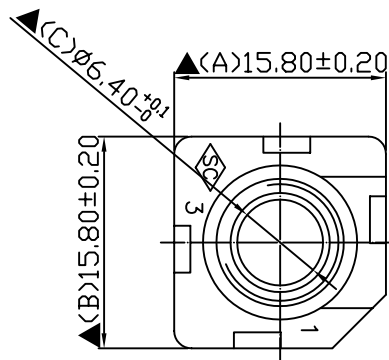

Ø3/8"X32W METRIC THREAD

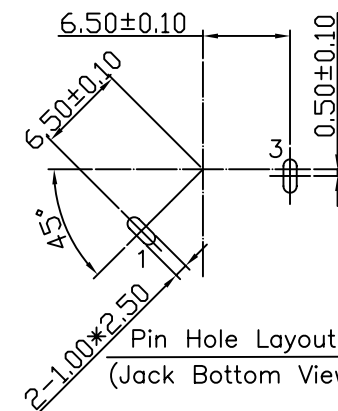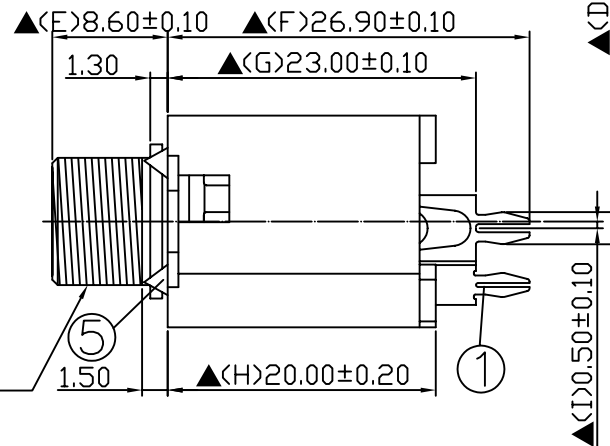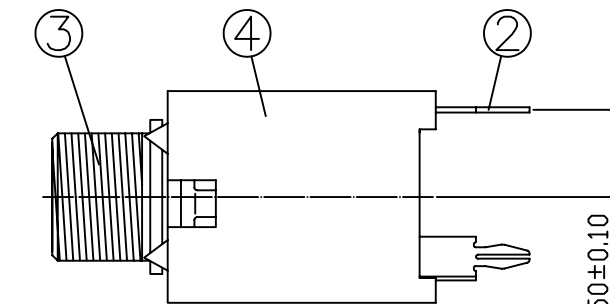

|     |                |                      |       |               |
|-----|----------------|----------------------|-------|---------------|
| 7.  | Washer         | 0.4T Brass           | 1     | Nickel Plated |
| 6.  | Nut            | 2.2T Brass           | 1     | Nickel Plated |
| 5.  | Earth Spring   | 0.3T Steel           | 1     | Nickel Plated |
| 4.  | Housing        | PBT                  | 1     | Black Color   |
| 3.  | Barrel         | Brass                | 1     | Nickel Plated |
| 2.  | Tip Spring     | 0.4T Phosphor Bronze | 1     | Silver Plated |
| 1.  | Earth Terminal | 0.4T Brass           | 1     | Silver Plated |
| NO. | Description    | Material             | Q 'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 10.12.2011 |     |      |      |         |

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ651M1NZS4BSWG

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS  
Compliant

For Reference  
僅供參考