
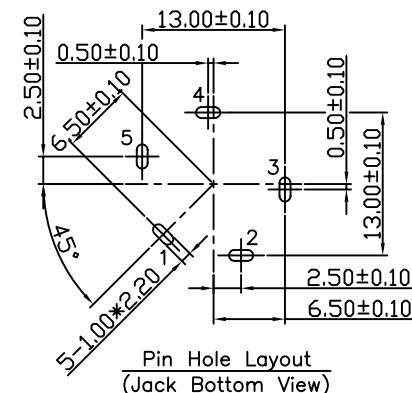
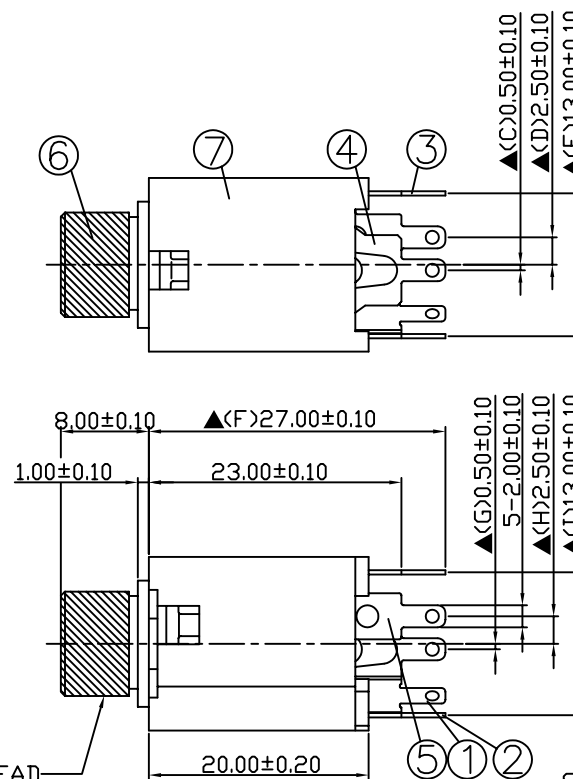

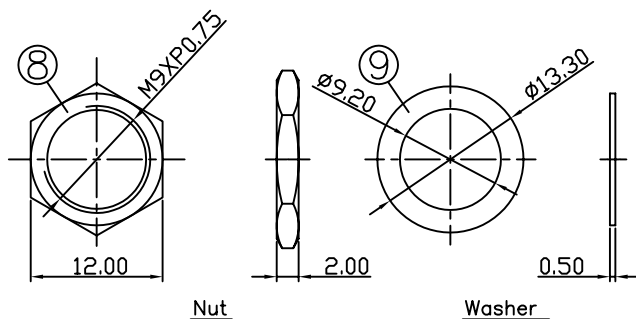




9.	Washer	0.5T Steel	1	Nickel Plated
8.	Nut	2.0T Steel	1	Nickel Plated
7.	Housing	PBT	1	Black Color
6.	Barrel	Brass	1	Nickel Plated
5.	Ring Shunt	0.4T Brass	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Tip Shunt	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		10.12.2011				
PART NAME : 6.3ø PHONE JACK		PART NUMBER: SCJ648M2NUS3B00G			VERSION: 2.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT: mm		SCALE: 1/1	

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考