

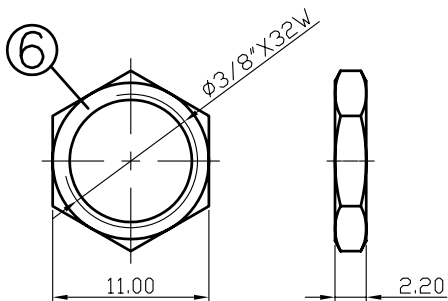




WASHER

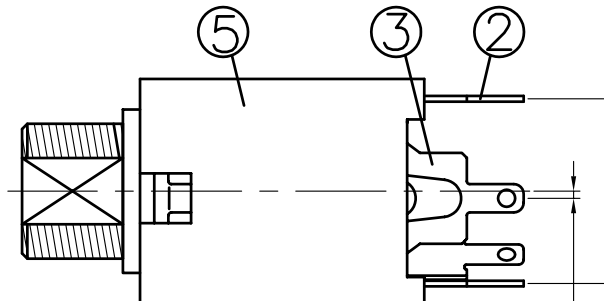

NUT

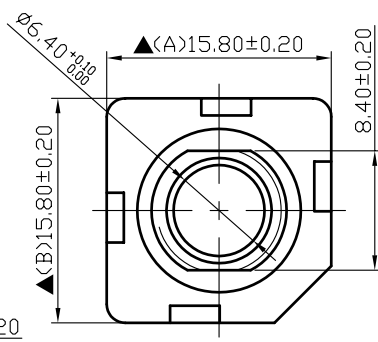

3/8"X32W PLASTIC BUSHING

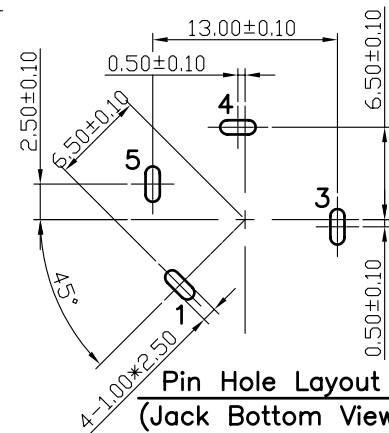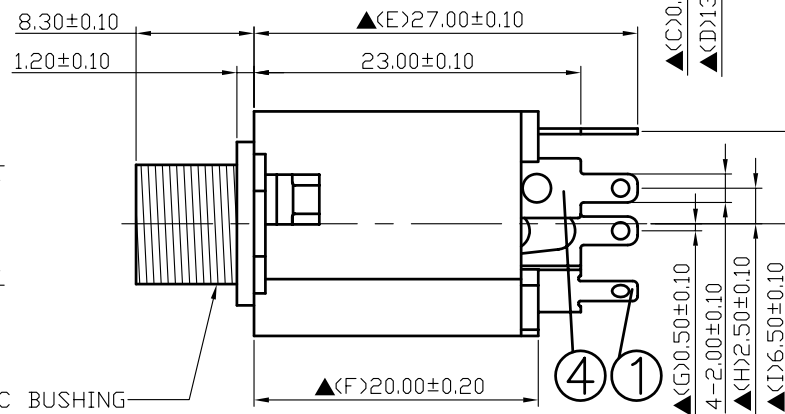

Pin Hole Layout
(Jack Bottom View)

7	Washer	0.4T Brass	1	Nickel Plated
6	Nut	2.2T Brass	1	Nickel Plated
5	Housing	PBT	1	Black Color
4	Ring Shunt	0.4T Brass	1	Silver Plated
3	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	10.12.2011				

PART NAME :6.3Ø PHONE JACK	PART NUMBER:SCJ649P20WS4B00G	VERSION:2.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考