

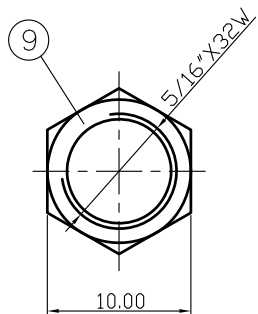



|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | C |

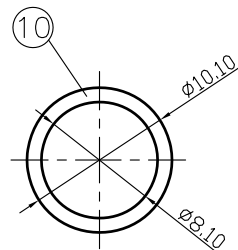





NUT



WASHER



|     |                |                      |      |               |
|-----|----------------|----------------------|------|---------------|
| 10. | Washer         | 0.3T Steel           | 1    | Nickel Plated |
| 9.  | Nut            | Low Lead Brass Rod   | 1    | Nickel Plated |
| 8.  | Insulator B    | Red Vulcanited Fibre | 1    | Red Color     |
| 7.  | Insulator A    | Red Vulcanited Fibre | 1    | Red Color     |
| 6.  | Pin(2.5φ)      | Low Lead Brass Rod   | 1    | Nickel Plated |
| 5.  | Bushing        | Low Lead Brass Rod   | 1    | Nickel Plated |
| 4.  | Pin Terminal   | 0.3T Brass           | 1    | Silver Plated |
| 3.  | Break Terminal | 0.3T Brass           | 1    | Silver Plated |
| 2.  | Sleeve Spring  | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Housing        | PBT+15%              | 1    | Black Color   |
| NO. | Description    | Material             | Q'TY | Finish        |

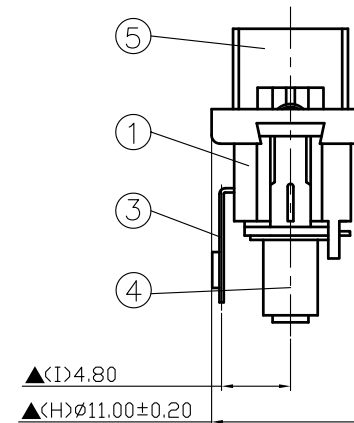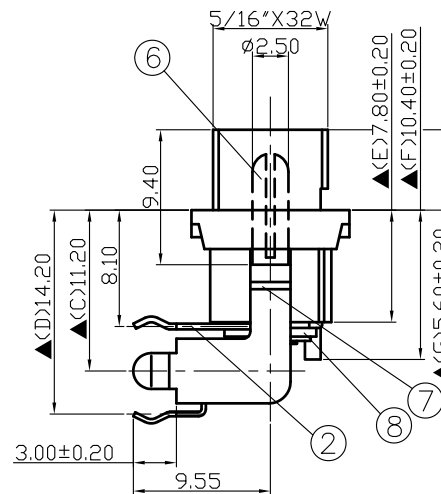

Pin Hole Layout  
(Jack Bottom View)

For Redference  
僅供參考

RoHS&SVHC  
Compliant

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Current Rating : Max 5.0A , 24V DC  
Insulation Resistance: 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension

|                                              |  |                              |         |      |             |         |
|----------------------------------------------|--|------------------------------|---------|------|-------------|---------|
|                                              |  | DATE                         | DWN     | CHKD | APVD        | MANAGER |
| S.C.PRECISION INDUSTRIAL CO., LTD.           |  | 06.21.2021                   | 王平華     |      |             |         |
| PART NAME :DC POWER JACK                     |  | PART NUMBER:SCD456DCS133B00L |         |      | VERSION:1.0 |         |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED |  |                              | UNIT:mm |      | SCALE:1/1   |         |