



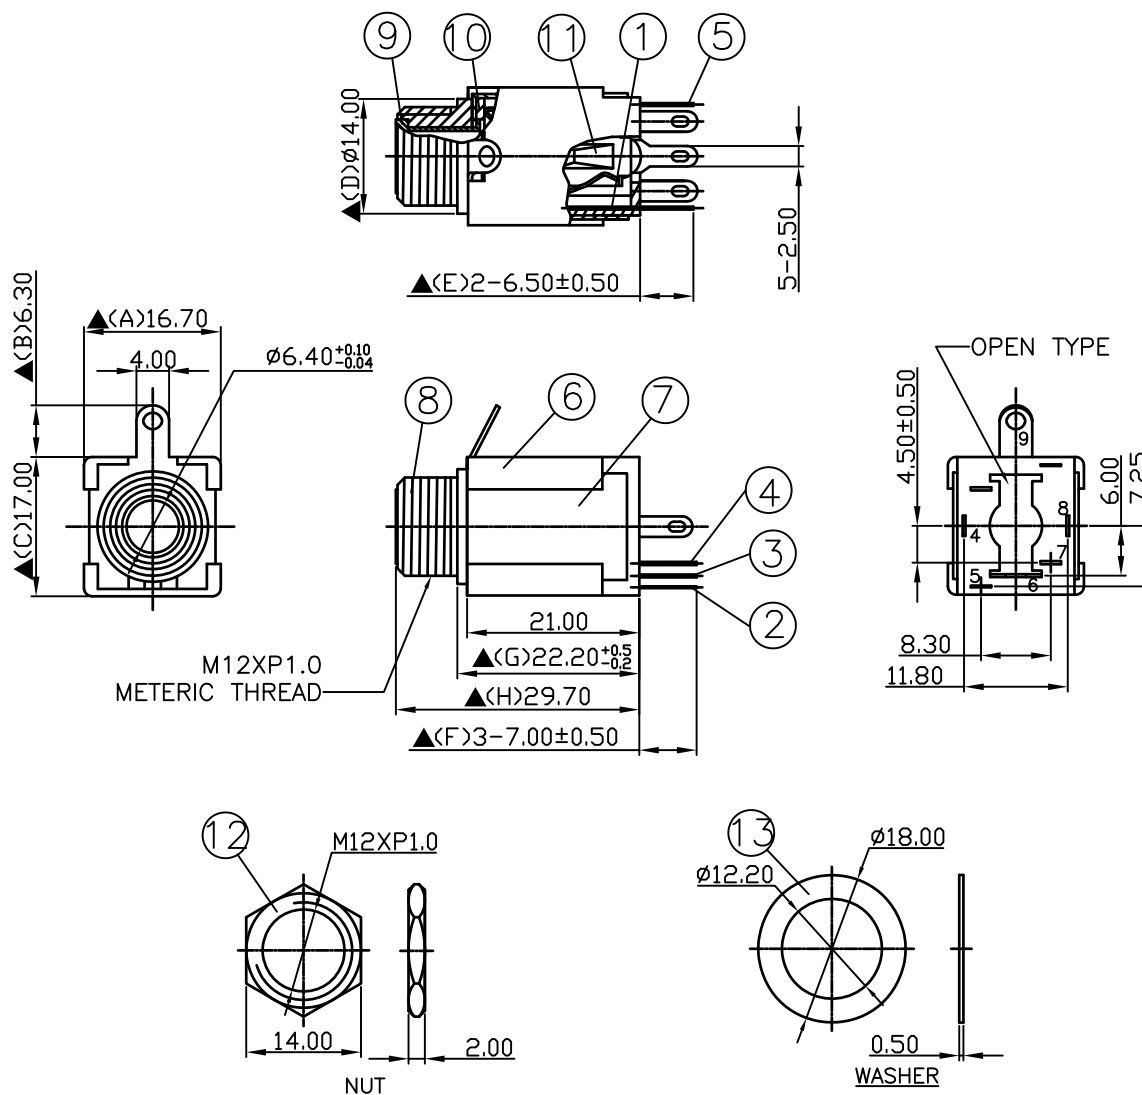

13	Washer	0.5T Steel	1	Nickel Plated
12	Nut	2.0T Steel	1	Nickel Plated
11	Insulator	POM	1	Ivory Color
10	Insulator	Red Vulcanited Fibre	1	Red Color
9	Bushing	Low Lead Brass Rod	1	Nickel Plated
8	Barre(W/Thread)	POM	1	Black Color
7	Cover	0.5T Steel	1	Nickel Plated
6	Housing	POM	1	Black Color
5	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
4	Transfer Terminal	0.4T Brass	1	Silver Plated
3	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
2	Break Terminal	0.2T Phosphor Bronze	1	Silver Plated
1	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

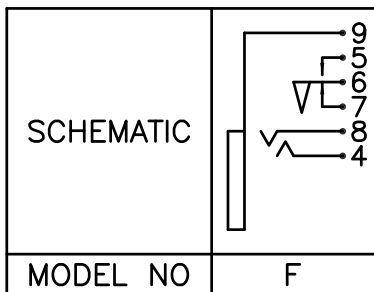

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.28.2021	王平華			

PART NAME : 6.3Ø PHONE JACK PART NUMBER: SCJ618R3NFS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Reference
 僅供參考

RoHS&SVHC
 Compliant